



## 7/16 DIN Female Connector Threaded Pin Attachment 4 Hole Flange Mount Pin Terminal, .975 inch Hole Spacing

### RF Connectors Technical Data Sheet

**PE4574A**

#### Configuration

- 7/16 DIN Female Connector
- IEC 169-4
- 50 Ohms
- Straight Body Geometry
- Pin Interface Type
- Threaded Pin Attachment
- 4 Hole Flange

#### Features

- Max. Operating Frequency 7.5 GHz
- Good VSWR of 1.3:1
- Gold Plated Brass Contact

#### Applications

- General Purpose Test
- Rack and Panel Mount Applications

#### Description

Pasternack's PE4574A 7/16 DIN female 4 hole flange mount connector with threaded pin attachment pin terminal (.975 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our 7/16 DIN female connector operates up to a maximum frequency of 7.5 GHz and offers good VSWR of 1.3:1. This 7/16 DIN 4 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our 7/16 DIN female 4 hole flange connector PE4574A datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		7.5	GHz
VSWR			1.3:1	
Operating Voltage (AC)			2,700	Vrms
Dielectric Withstanding Voltage (AC)			4,000	Vrms

#### Mechanical Specifications

##### Size

Length	0.846 in [21.49 mm]
Width/Dia.	1.26 in [32.00 mm]
Weight	0.176 lbs [79.83 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Female Connector Threaded Pin Attachment 4 Hole Flange Mount Pin Terminal, .975 inch Hole Spacing PE4574A](#)



7/16 DIN Female Connector Threaded Pin Attachment 4 Hole  
Flange Mount Pin Terminal, .975 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4574A

**Material Specifications**

Description	Material	Plating
Contact	Brass	Gold
Insulation	PTFE	
Outer Conductor	Brass	Nickel

**Environmental Specifications**

**Temperature**

Operating Range -55 to +155 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

7/16 DIN Female Connector Threaded Pin Attachment 4 Hole Flange Mount Pin Terminal, .975 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Female Connector Threaded Pin Attachment 4 Hole Flange Mount Pin Terminal, .975 inch Hole Spacing PE4574A](#)

URL: <https://www.pasternack.com/7-16-female-standard-standard-pin-terminal-connector-pe4574a-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4574A CAD Drawing

7/16 DIN Female Connector Threaded Pin Attachment 4 Hole  
Flange Mount Pin Terminal, .975 inch Hole Spacing

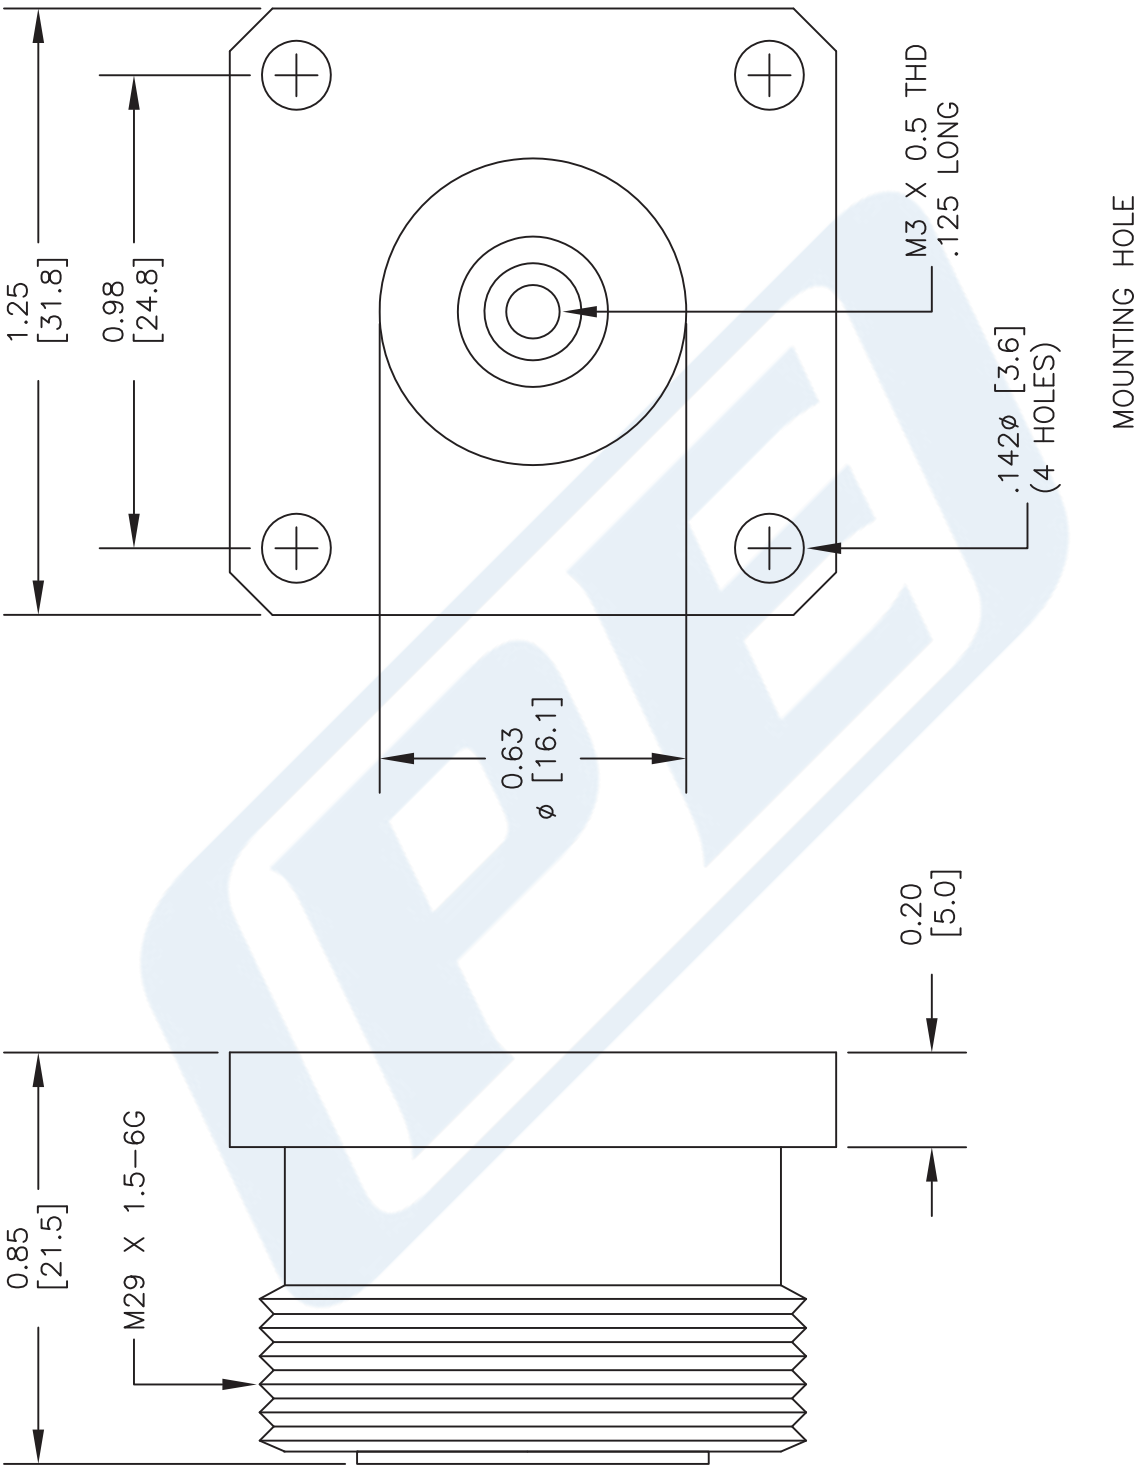

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE4574A**

FSCM NO. 53919

2233

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)