



2 Watt RF Load DC to 12 GHz With SMA
Male Input Stainless Steel Body

RF Terminations Technical Data Sheet

PE6TR1145

Features

- DC to 12 GHz Frequency Range
- 50 Ohm Impedance
- SMA Male Coaxial Interface
- Max VSWR 1.15:1
- Max Power 2 Watts (CW)

Applications

- WIFI 6E
- 5G Cellular bands
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military
- Communication

Description

Pasternack's PE6TR1145 is an RF termination (also called RF load or dummy load) that operates from DC to 12 GHz and handles up to 2 Watt (CW). Our SMA termination / load has a male gender. PE6TR1145 SMA load termination offers 1.15:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|---------|---------|-------|
| Frequency Range | DC | | 12 | GHz |
| Impedance | | 50 | | Ohms |
| VSWR | | | 1.15:1 | |
| Input Power (CW) | | | 2 | Watts |
| Derated linearly to 1W at +165°C | | | | |
| Dielectric Withstanding Voltage (DC) | | | 1,500 | Vdc |
| Operating Voltage (DC) | | | 500 | Vdc |

Mechanical Specifications

| | |
|-------------|--------------------|
| Size | |
| Length | 0.52 in [13.21 mm] |
| Width | 0.315 in [8 mm] |
| Height | 0.315 in [8 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt RF Load DC to 12 GHz With SMA Male Input Stainless Steel Body PE6TR1145](#)



2 Watt RF Load DC to 12 GHz With SMA
Male Input Stainless Steel Body

RF Terminations Technical Data Sheet

PE6TR1145

Weight 0.004 lbs [1.81 g]
Package Type Connectorized

Configuration
Connector SMA Male

Material Specifications

| Description | Material | Plating |
|---------------------|------------------|----------------------------|
| Connector 1 Contact | Beryllium Copper | Gold |
| Insulation | Teflon | |
| Body | Stainless Steel | Passivated Stainless Steel |

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C
Humidity MIL-STD-202, Method 106
Thermal Shock MIL-STD-202, Method 107, Condition B
Salt Spray MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

2 Watt RF Load DC to 12 GHz With SMA Male Input Stainless Steel Body from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt RF Load DC to 12 GHz With SMA Male Input Stainless Steel Body PE6TR1145](#)

URL: <https://www.pasternack.com/2-watts-sma-male-feed-thru-load-12-ghz-pe6tr1145-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6TR1145 CAD Drawing

2 Watt RF Load DC to 12 GHz With SMA Male Input Stainless Steel Body

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3


4

5

6

REVISION

| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
|------|-----|-----------------|------------|------------|----------|
| | A | INITIAL RELEASE | 05/10/2023 | DZINN | SPONG |

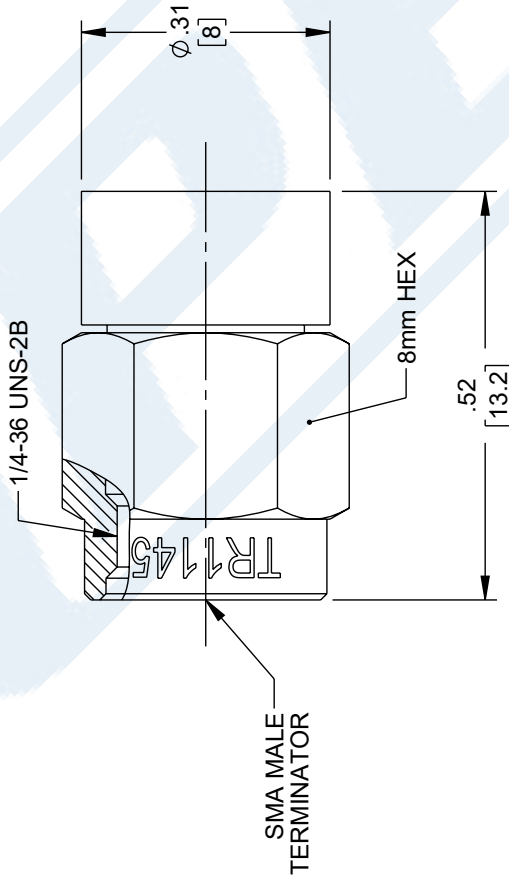

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ± 1/32
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤ 12 [305] = ±.125 [-0]
> 12 [305] ≤ 60 [1524] = ±.25 [-0]
> 60 [1524] ≤ 120 [3048] = ±.4 [102] [-0]
> 120 [3048] ≤ 300 [7620] = ±.6 [152] [-0]
> 300 [7620] = ±.6% [-0]

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE



Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

SMA MALE TERMINATOR, 2 WATT, 50 OHM,
12 GHz, VSWR 1.15, STAINLESS STEEL



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE

SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev.D2