



7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated

TECHNICAL DATA SHEET

PE91243

Configuration

Connector 1	7/16 DIN Male
Impedance 1	50 Ohms
Connector 2	4.1/9.5 Mini DIN Male
Impedance 2	50 Ohms
Adapter Design	Standard
Body Style	Straight

Electrical Specifications

Frequency Range	DC to 6 GHz
Maximum VSWR	1.3:1

Frequency 1

Frequency, GHz	DC to 3
VSWR	1.15:1
Return Loss, dB	23.13

Frequency 2

Frequency, GHz	3 to 4
VSWR	1.2:1
Return Loss, dB	20.8

Mechanical Specifications

Size

Length, in [mm]	1.969 [50.01]
-----------------	---------------

Connector 1

Type	7/16 DIN Male
Inner Conductor Material and Plating	Brass, Silver
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	32
Torque, ft-lbs [Nm]	18.333 [24.86]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Connector 2

Type	4.1/9.5 Mini DIN Male
Inner Conductor Material and Plating	Brass, Silver
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	22
Torque, in-lbs [Nm]	90 [10.17]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated PE91243](#)



7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated

TECHNICAL DATA SHEET

PE91243

Environmental Specifications

Temperature

Operating Range

-40 to +120 deg C

Ingress Protection

IP67 UnMated

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

06/16/2014

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated PE91243](http://www.pasternack.com/7-16-male-4.1-9.5-mini-din-male-straight-adapter-pe91243-p.aspx)

URL: <http://www.pasternack.com/7-16-male-4.1-9.5-mini-din-male-straight-adapter-pe91243-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91243 CAD Drawing

7/16 DIN Male to 4.1/9.5 Mini DIN Male Adapter IP67 UnMated

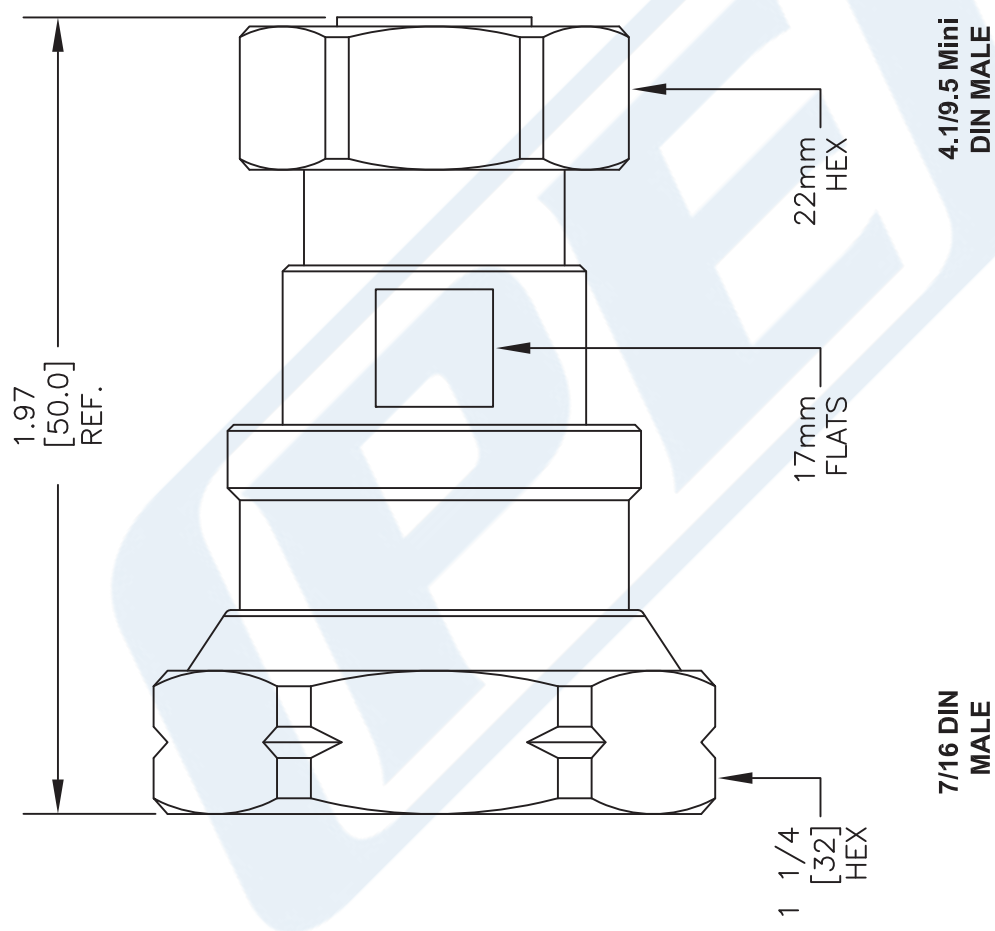

NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
CAD FILE	060614	SCALE	N/A
SIZE	A		2233

DWG TITLE	FSCM NO. 53919
PE91243	

**PASTERNAK®**
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com