



RF Adapter, 45 Degree Angle 2.4mm plug
to 2.4mm jack 50GHz VSWR 1.25

RF Adapters Technical Data Sheet

PE91588

Configuration

- 2.4mm Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohm
- 45 Degree Body Geometry

Features

- Max VSWR of 1.25:1 up to 50 GHz
- Gold over Nickel Plated Beryllium Copper Contact

Applications

- General Purpose Test

Description

2.4 mm adapter PE91588 from Pasternack Enterprises is part of a very large selection of in-stock interconnect RF components. Our 2.4 mm to 2.4 mm adapter is a coaxial adapter design with a 50 Ohm impedance. This 50 Ohm 2.4 mm adapter is manufactured to precise RF adapter specifications and has a maximum VSWR of 1.250.

Our in-series connection type RF adapter, which operates to 50 GHz makes connections in tight spaces easier. This passivated stainless steel RF adapter can be used to make connections between two connector types that would not otherwise mate. This 2.4 mm adapter contains beryllium copper contacts with gold over nickel contact plating.

This 2.4 mm to 2.4 mm adapter is constructed with male gender on side 1 and female on side 2. PE91588 2.4 mm male to 2.4 mm female coaxial adapter from Pasternack has a 45-degree angled body ideal for routing RF/Microwave signals in tight spaces. Additionally, RF adapters can be utilized to protect connectors on expensive equipment where the number of connect and disconnect cycles is high.

Pasternack 2.4 mm female to 2.4 mm male adapter is part of over one million RF microwave and millimeter wave components in stock. 45-degree angle RF 2.4 mm adapter is ready for same day purchase and shipping worldwide. We also stock and/or custom build 2.4 mm coaxial cables that ship quickly from our facility for all your RF adapter component needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		50	GHz
VSWR			1.25:1	

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 8	8 to 10	10 to 25	25 to 50	GHz
Insertion Loss, Max	0.14	0.198	0.221	0.35	0.495	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RF Adapter, 45 Degree Angle 2.4mm plug to 2.4mm jack 50GHz VSWR 1.25 PE91588](#)



RF Adapter, 45 Degree Angle 2.4mm plug
to 2.4mm jack 50GHz VSWR 1.25

RF Adapters Technical Data Sheet

PE91588

Mechanical Specifications

Size

Length	0.92 in [23.37 mm]
Width	0.32 in [8.13 mm]
Height	0.52 in [13.21 mm]
Weight	0.02 lbs [9.07 g]

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Female
Polarity	Standard	Standard

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	2.4mm Male		2.4mm Female	
Contact	Beryllium Copper	Gold over Nickel	Beryllium Copper	Gold over Nickel
Outer Conductor			Passivated Stainless Steel	
Body	Passivated Stainless Steel		Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel			

Environmental Specifications

Temperature

Operating Range	-55 to +105 °C
-----------------	----------------

Humidity

Thermal Shock

Salt Spray

MIL-STD-202, Method 206

MIL-STD-202, Method 107, Condition B

MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RF Adapter, 45 Degree Angle 2.4mm plug to 2.4mm jack 50GHz VSWR 1.25 PE91588](#)



RF Adapter, 45 Degree Angle 2.4mm plug
to 2.4mm jack 50GHz VSWR 1.25

RF Adapters Technical Data Sheet

PE91588

RF Adapter, 45 Degree Angle 2.4mm plug to 2.4mm jack 50GHz VSWR 1.25 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RF Adapter, 45 Degree Angle 2.4mm plug to 2.4mm jack 50GHz VSWR 1.25 PE91588](https://www.pasternack.com/2.4mm-male-to-2.4mm-female-45-degree-adapter-pe91588-p.aspx)


URL: <https://www.pasternack.com/2.4mm-male-to-2.4mm-female-45-degree-adapter-pe91588-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91588 CAD Drawing

RF Adapter, 45 Degree Angle 2.4mm plug to 2.4mm jack 50GHz VSWR 1.25

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/03/2022	DWANG

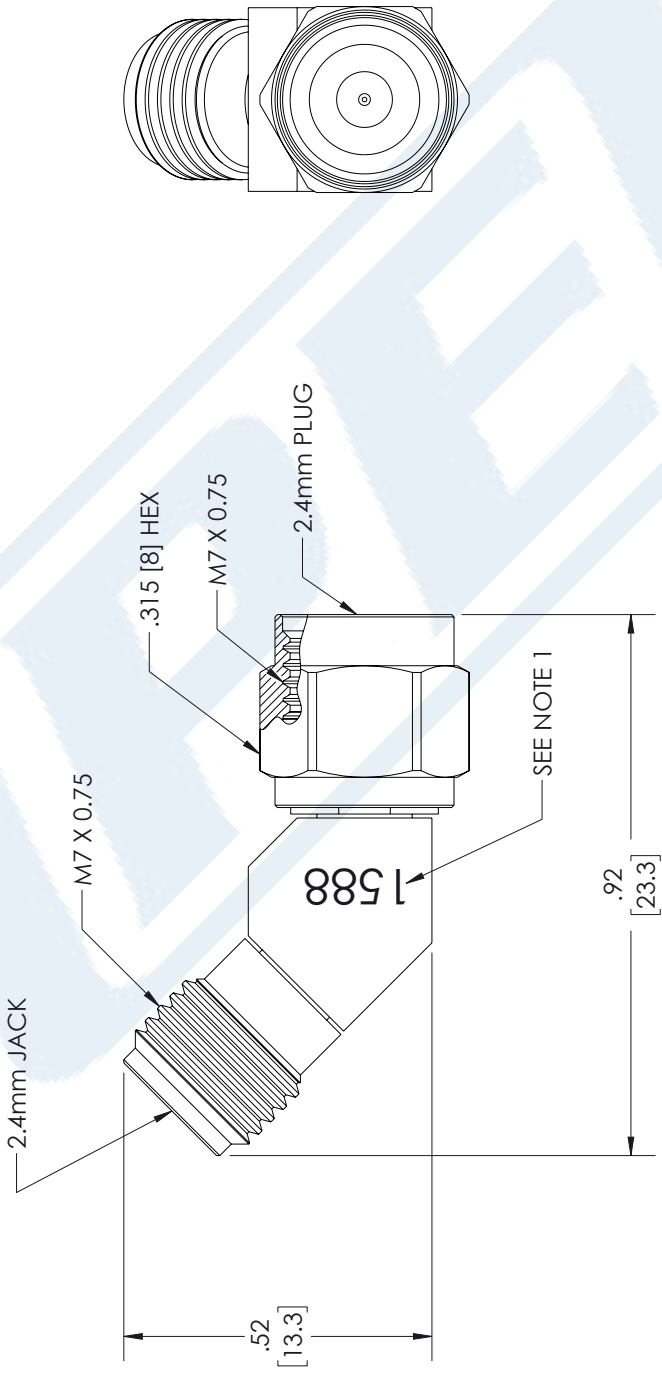

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ± .2 [.08] FRACTIONS
.XX = ± .02 [.51] ± 1/32
.XXX = ± .005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:
L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINITE brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	AKRESOWSKI	PE91588	A

NOTES:
1. ITEM IS MARKED WITH ITEM NUMBER APPROXIMATELY WHERE SHOWN.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.