



Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter

RF Adapters Technical Data Sheet

PE9624

Configuration

- TNC Female Connector 1
- TNC Female Connector 2
- 75 Ohm
- Straight Body Geometry
- Bulkhead Mount Method

Features

- Hermetically Sealed
- TNC interface compliant with MIL-STD-348
- Contact plating according to QQ-S-365
- Silver Plated Beryllium Copper Contact
- Silver Plated Contact

Applications

- General Purpose Test
- Vacuum Test Environment
- Rack Mounted Equipment

Description

Pasternack's PE9624 bulkhead hermetically sealed 75 ohm TNC female to TNC female adapter is part of our full line of RF components available for same-day shipping. Our TNC to TNC adapter has a female to female gender configuration. PE9624 TNC female to TNC female adapter operates to 1.5 GHz. This RF TNC bulkhead to TNC adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. This hermetic TNC to TNC adapter prevents the leakage of gases, making it suitable for high pressure or vacuum applications or whenever an airtight seal is required.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1.5	GHz
Impedance		75 Ohm		
Operating Voltage (AC)			500	Vrms
Dielectric Withstanding Voltage (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size

Length	1.55 in [39.37 mm]
Width	0.69 in [17.40 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter PE9624](#)



Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter

RF Adapters Technical Data Sheet

PE9624

Height 0.69 in [17.40 mm]
Weight 0.05 lbs [21.18 g]

Description	Connector 1	Connector 2
Type	TNC Female	TNC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Connector Option	Hermetically Sealed	Hermetically Sealed
Mating Cycles, Min*	500	500

Mechanical Specification Notes:

After sealing, this item shall withstand a pressure differential of one atmosphere with the leak rate not to exceed 1×10^{-7} CC/sec. of helium

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	TNC Female		TNC Female	
Contact	Beryllium Copper	Silver QQ-S-365	Beryllium Copper	Silver QQ-S-365
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Nickel QQ-N-290	Brass	Nickel QQ-N-290
Body	Brass	Nickel	Brass	Nickel

Environmental Specifications

Temperature

Operating Range -65 to +165 °C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter PE9624](#)



Bulkhead Mount Hermetically Sealed 75 Ohm TNC
Female to 75 Ohm TNC Female Adapter

RF Adapters Technical Data Sheet

PE9624

Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bulkhead Mount Hermetically Sealed 75 Ohm TNC Female to 75 Ohm TNC Female Adapter PE9624](https://www.pasternack.com/tnc-female-tnc-female-straight-adapter-pe9624-p.aspx)

URL: <https://www.pasternack.com/tnc-female-tnc-female-straight-adapter-pe9624-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9624 CAD Drawing

Bulkhead Mount Hermetically Sealed 75 Ohm TNC
Female to 75 Ohm TNC Female Adapter

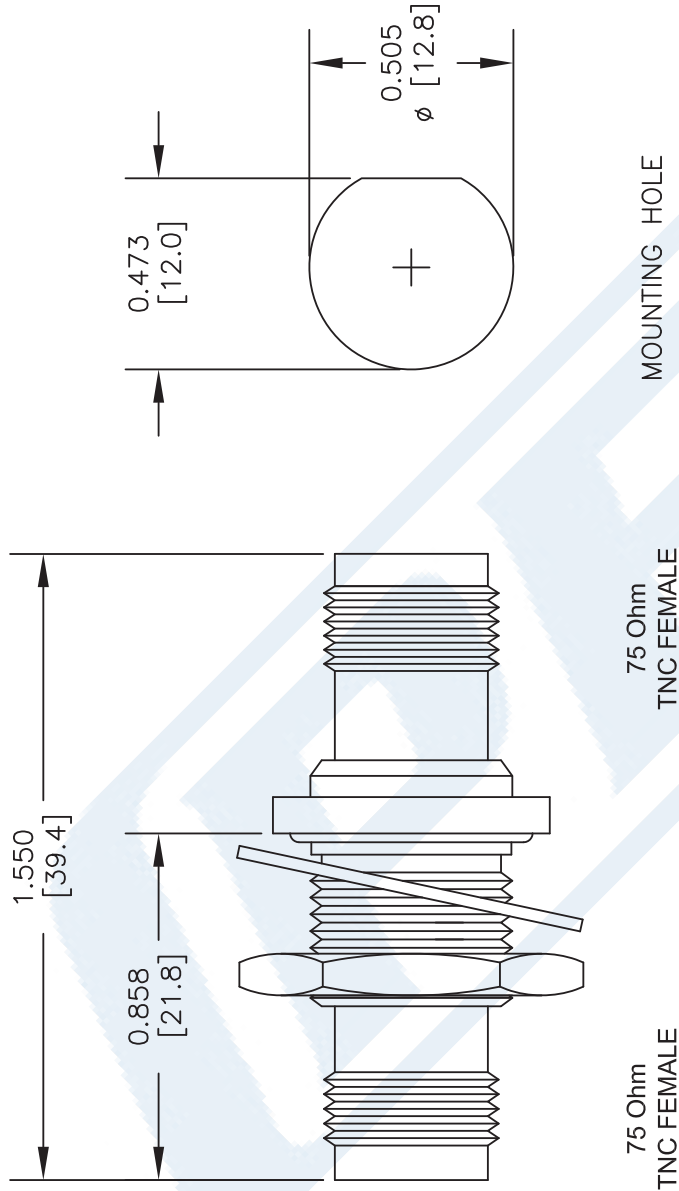

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE9624

CAGE CODE 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 110716

SCALE N/A

SIZE A

2233