




Connectors > PCB Connectors > Board-to-Board Connectors > PC/104 Connectors

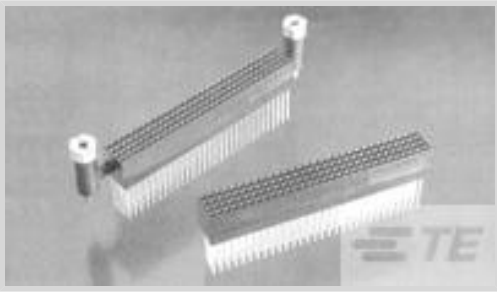

Number of Positions: 120

Centerline (Pitch): 2 mm [.079 in]

Number of Loaded Positions: 120

Contact Current Rating (Max): 3 A

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board

Configuration Features

Stacking Configuration	Non-Stack Through
Number of Positions	120
Number of Loaded Positions	120

Electrical Characteristics

Insulation Resistance	1000 MΩ
Dielectric Withstanding Voltage (Max)	500 VAC

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.85 mm[.112 in]

Mechanical Attachment



Connector Mounting Type	Board Mount
PCB Mount Retention Type	Action/Compliant Tail

Housing Features

Housing Material	Nylon GF
Centerline (Pitch)	2 mm[.079 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on




requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

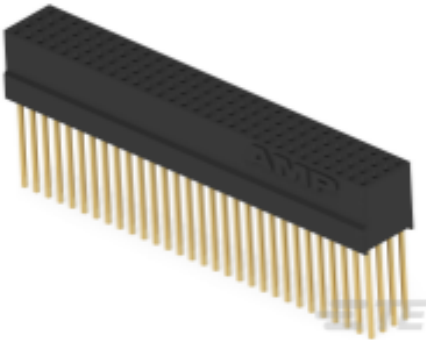


TE Part # 1375799-1
ASSY, 120 POS PC104 PLUS

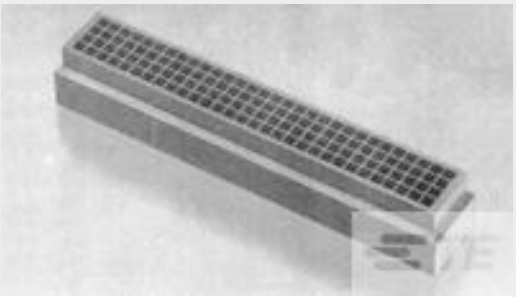

TE Part # 1375801-1
SHROUD, 120 POS PC104 PLUS


Also in the Series | AMPMODU PC/104

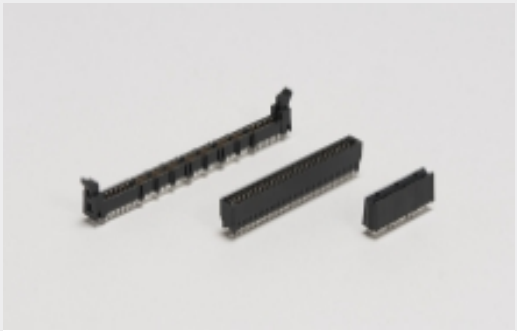

Card Edge Power Connectors(1)



Hand Crimping Tools(1)

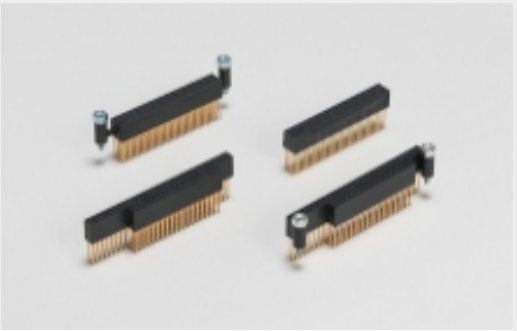

PC/104 Connectors(25)



Rack & Panel Connectors(1)



Rectangular Connector Housings(1)




Rectangular Power Connectors(1)



Standard Rectangular Connectors(1)

Customers Also Bought

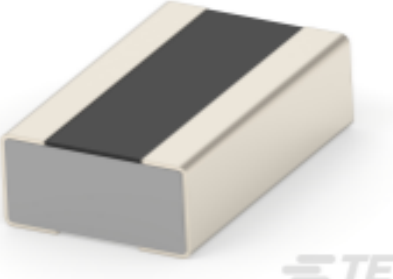


TE Part #1-2176536-4
RLW73 A2 1% R12 200ppm 1k RL



TE Part #4-1879133-9
RN 0603 2K8 0.1% 10PPM 1K RL



TE Part #6-103673-0
11 MTE HDR SRRA LATCH W/HLDWN

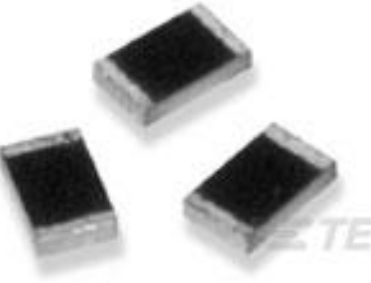

TE Part #9-1879746-8
RP 1J 60K4 0.1% 15PPM CUT LENGTH



TE Part #1676459-1
RN 0805 8K87 0.1% 10PPM CUT LENGTH

TE Part #6-1879745-5
RP 1J 2K55 0.1% 15PPM CUT LENGTH

TE Part #8-2176089-5
RP 1J 0.166W 88K7 0.1% 25PPM 1K RL

TE Part #1-1879745-6
RP 1J 787R 0.1% 15PPM CUT LENGTH

TE Part #2842139-7
14P,2MM,BRK HDR,DRV,2.8,0.38AU, BOX

TE Part #1596489-2
INSERTION BLOCK FOR MULTIGIG P

Documents

Product Drawings
ASSY, 120 POS PC104 PLUS
English

CAD Files
Customer View Model
ENG_CVM_1375800-1_G.3d_igs.zip
English
Customer View Model
ENG_CVM_1375800-1_G.3d_stp.zip
English
Customer View Model
ENG_CVM_1375800-1_G.2d_dxf.zip
English
3D PDF
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
AMPMODU_INTERCONNECTION_SYSTEM_SECTION1AND2
English

Product Specifications
Application Specification
English

Agency Approvals
UL Report



English

[UL Report](#)

English