



CII

TE Internal #: 1472962-1

Time Delay Relay, AC & DC, 2 Form C DPDT-CO, 10 A Contact Rating, Socket Mount, 65 °C [149 °F]

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: Time Delay Relay

Current Type: AC & DC

Contact Arrangement: 2 Form C DPDT-CO

Contact Current Rating: 10 A

Product Mount Type: Socket Mount

Features

Product Type Features

Relay & Contactor Type	Time Delay Relay
------------------------	------------------

Configuration Features

Contact Arrangement	2 Form C DPDT-CO
---------------------	------------------

Electrical Characteristics

Input Voltage	48 VAC
Contact Current Rating	10 A

Mechanical Attachment

Product Mount Type	Socket Mount
--------------------	--------------

Dimensions

Product Width	50 mm[1.97 in]
Product Length	50 mm[1.97 in]
Product Height	101 mm[3.95 in]

Usage Conditions

Operating Temperature Range	-30 – 65 °C
Environmental Ambient Temperature (Max)	65 °C[149 °F]

Operation/Application

Type of Control	Knob
-----------------	------



Delay Time	.5 – 15 seconds
Mode of Operation	On-Delay
Repeatability (Max)	±1% ±4 msec
Current Type	AC & DC

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 5-1437470-3
SSC12ACA=120V 50/60HZ 1/30 SEC




Customers Also Bought




TE Part #CAT-WCSM
Thick-Wall Heat Shrink Tubing




TE Part #4-1437470-6
SSC12ABA=120V 50/60HZ .5/15 SE

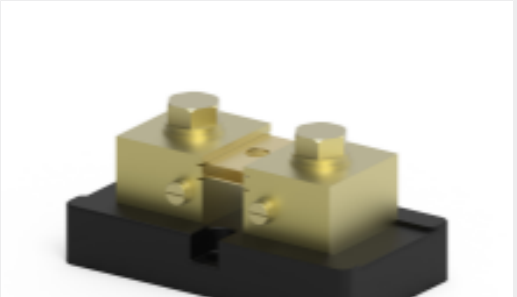


TE Part #CG3315-000
CI-TM40050




TE Part #661245-000
HVES-1524D

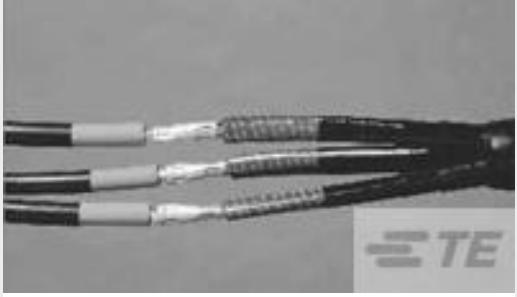


TE Part #924763-000
HVS-T-1582S



TE Part #629995-000
GHFC-3-90(B18)

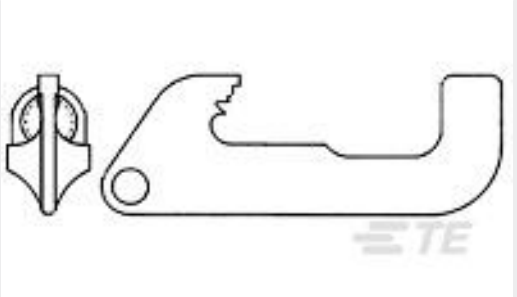

TE Part #47667-8
SML HD FRG-MC-HT-MGFL-SP-BOC-MRK-PNT



TE Part #9-1437470-3
SSC12AMA=120VAC 50/60HZ .5/15

Documents

Product Drawings
SSC12FBA="RLY,ON,2P,48VAC/48VD
English

Datasheets & Catalog Pages
5-1773450-5_sec12_SSC
English