




Terminals & Splices > Quick Disconnects

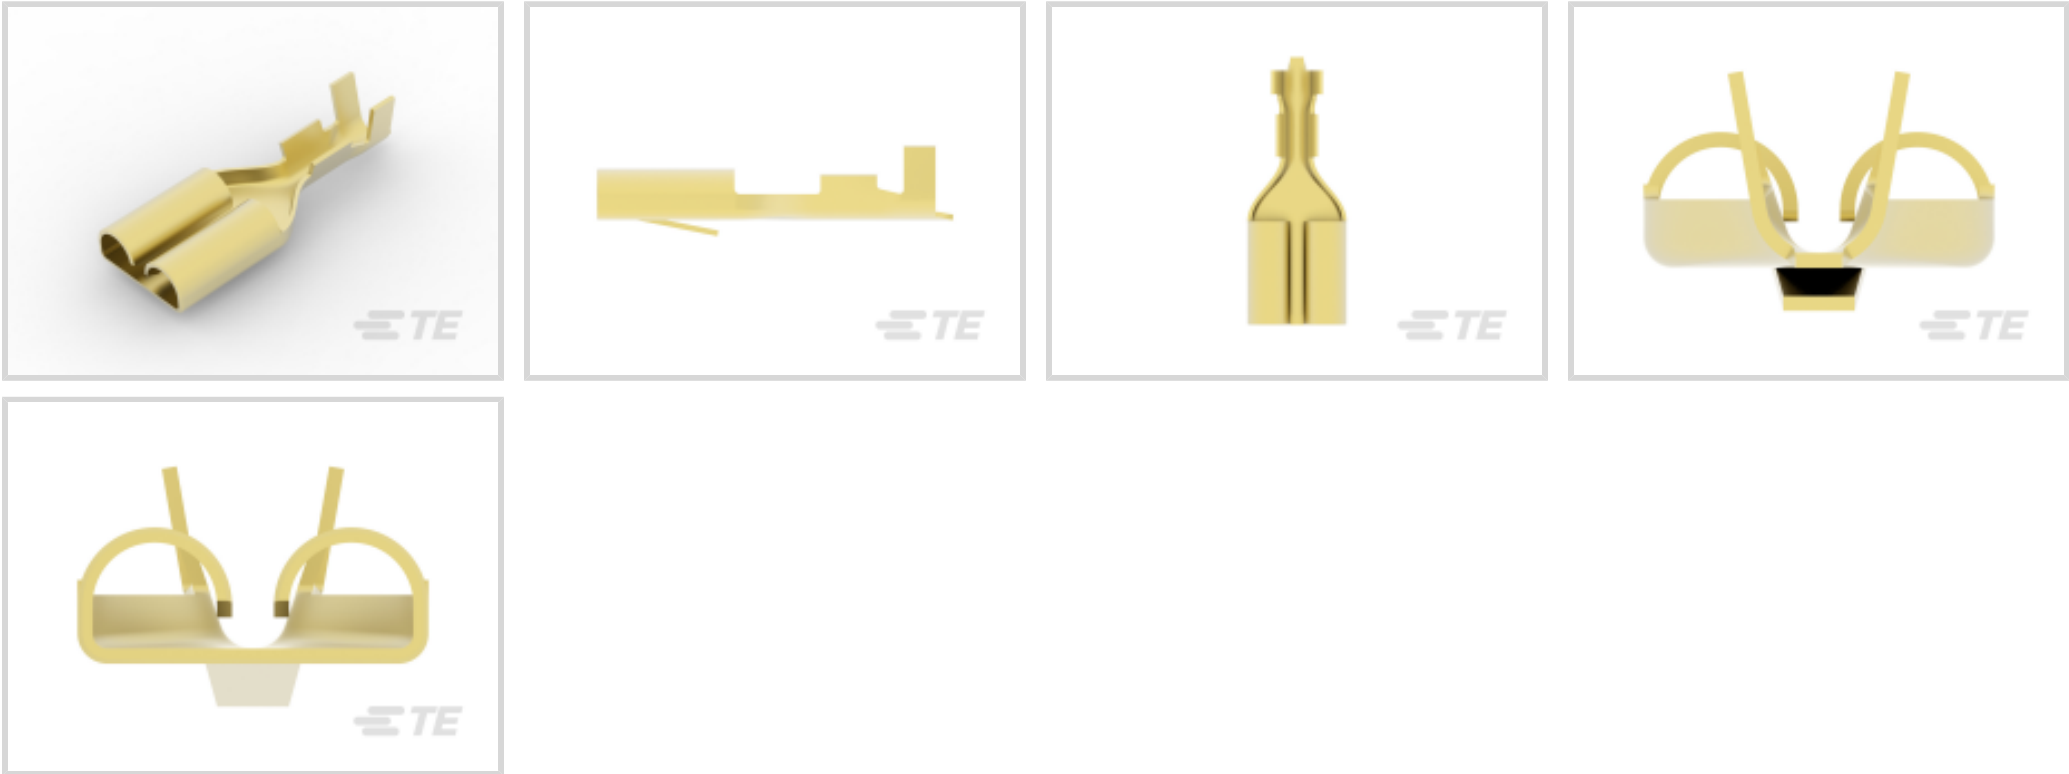

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .82 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	4.9 – 34.3 Newton

Dimensions

Product Length	21.5 mm[.846 in]
Compatible Insulation Diameter Range	1.52 – 2.6 mm[.06 – .102 in]
Terminal Material Thickness	.33 mm[.013 in]
Wire Size	.32 – .82 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability







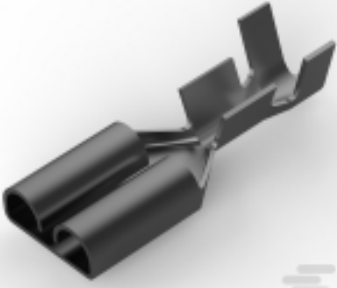



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these




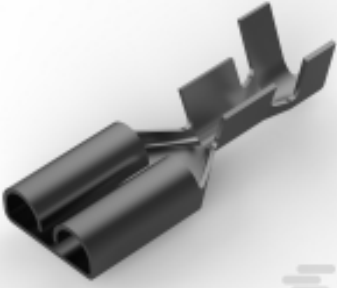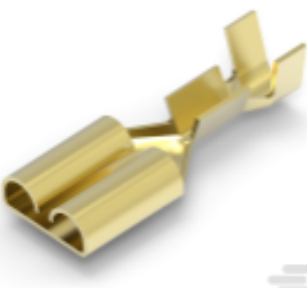

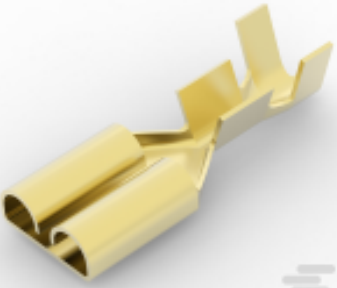limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

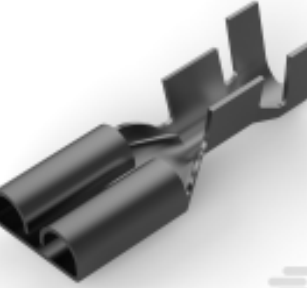Compatible Parts


 <p>TE Part # 170031-2 FF 250 REC 20-14AWG TPBR REREELING</p>	 <p>TE Part # 280095-1 FF 250 REC 0.3-0.8MM2 BR</p>	 <p>TE Part # 640841-1 BLADE REC 250 20-16AWG BR</p>	 <p>TE Part # 180351-1 FF 250 REC 4-6MM2 BR</p>
 <p>TE Part # 170031-1 FF 250 REC 20-14AWG BR</p>	 <p>TE Part # 1989879-1 .250 SRS FASTIN-ON REC.</p>	 <p>TE Part # 4-170031-2 FF 250 20-14AWG TPBR REREELING</p>	 <p>TE Part # 280095-2 FF 250 REC 0.3-0.8MM2 PTBR</p>
 <p>TE Part # 170089-1 FF 250 REC 14-12AWG BR</p>	 <p>TE Part # 170089-2 FF 250 REC 14-12AWG TPBR</p>		

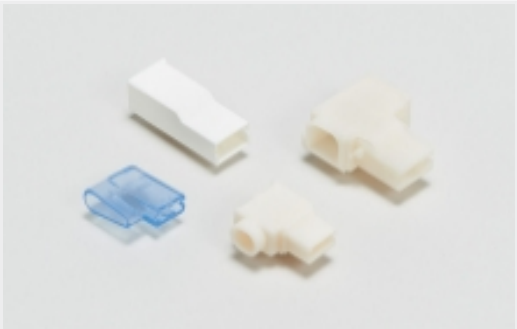Also in the Series | FASTIN-FASTON 250


 <p>Crimp Terminal Housings(195)</p>	 <p>Insertion & Extraction Tools(2)</p>	 <p>Quick Disconnects(216)</p>
---	---	---

Customers Also Bought






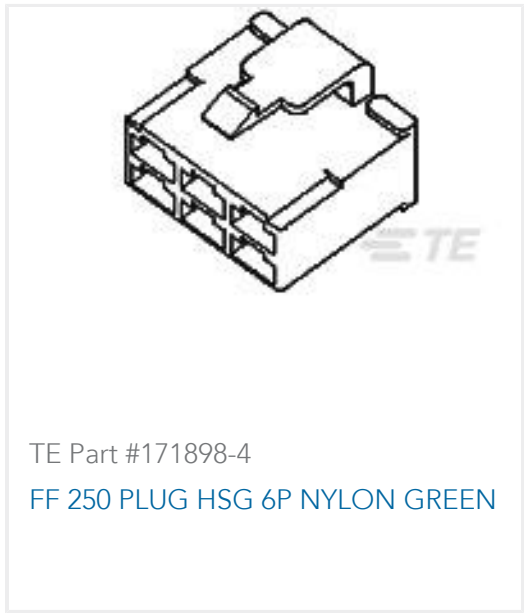
TE Part #2-172132-2
FF 250 PLUG HSG 3P NYLON BLACK




TE Part #1-1703498-3
2POS, MCON 1.2 LL TAB SEALED COD A




TE Part #CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM, HOUSING




TE Part #171898-4
FF 250 PLUG HSG 6P NYLON GREEN

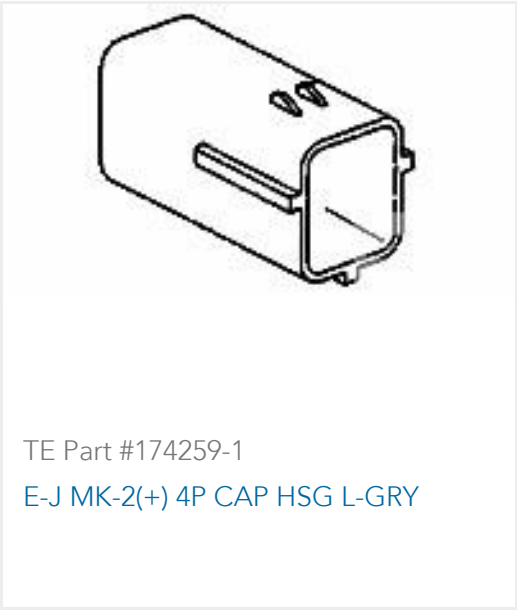


TE Part #174259-1
E-J MK-2(+) 4P CAP HSG L-GRY



TE Part #172492-7
PULSE LOCK PLUG HSG 12P



TE Part #172493-7
PULSE LOCK PLUG HSG 18P



TE Part #172316-7
PULSE LOCK PLUG HSG 18P YELLOW

Documents

Product Drawings

FF 250 REC 22-18AWG BR WITH LATCH

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170303-1_K_c-170303-1-k.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170303-1_K_c-170303-1-k.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170303-1_K_c-170303-1-k.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

.250 Series Tab and Receptacle with and without Latch

Japanese

Product Specification

Japanese