




MTEI

TE Internal #: 172051-3
Connector Assembly, Receptacle, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Insulation Displacement (IDC), 1 Row, Red, Wire & Cable, MTEI

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

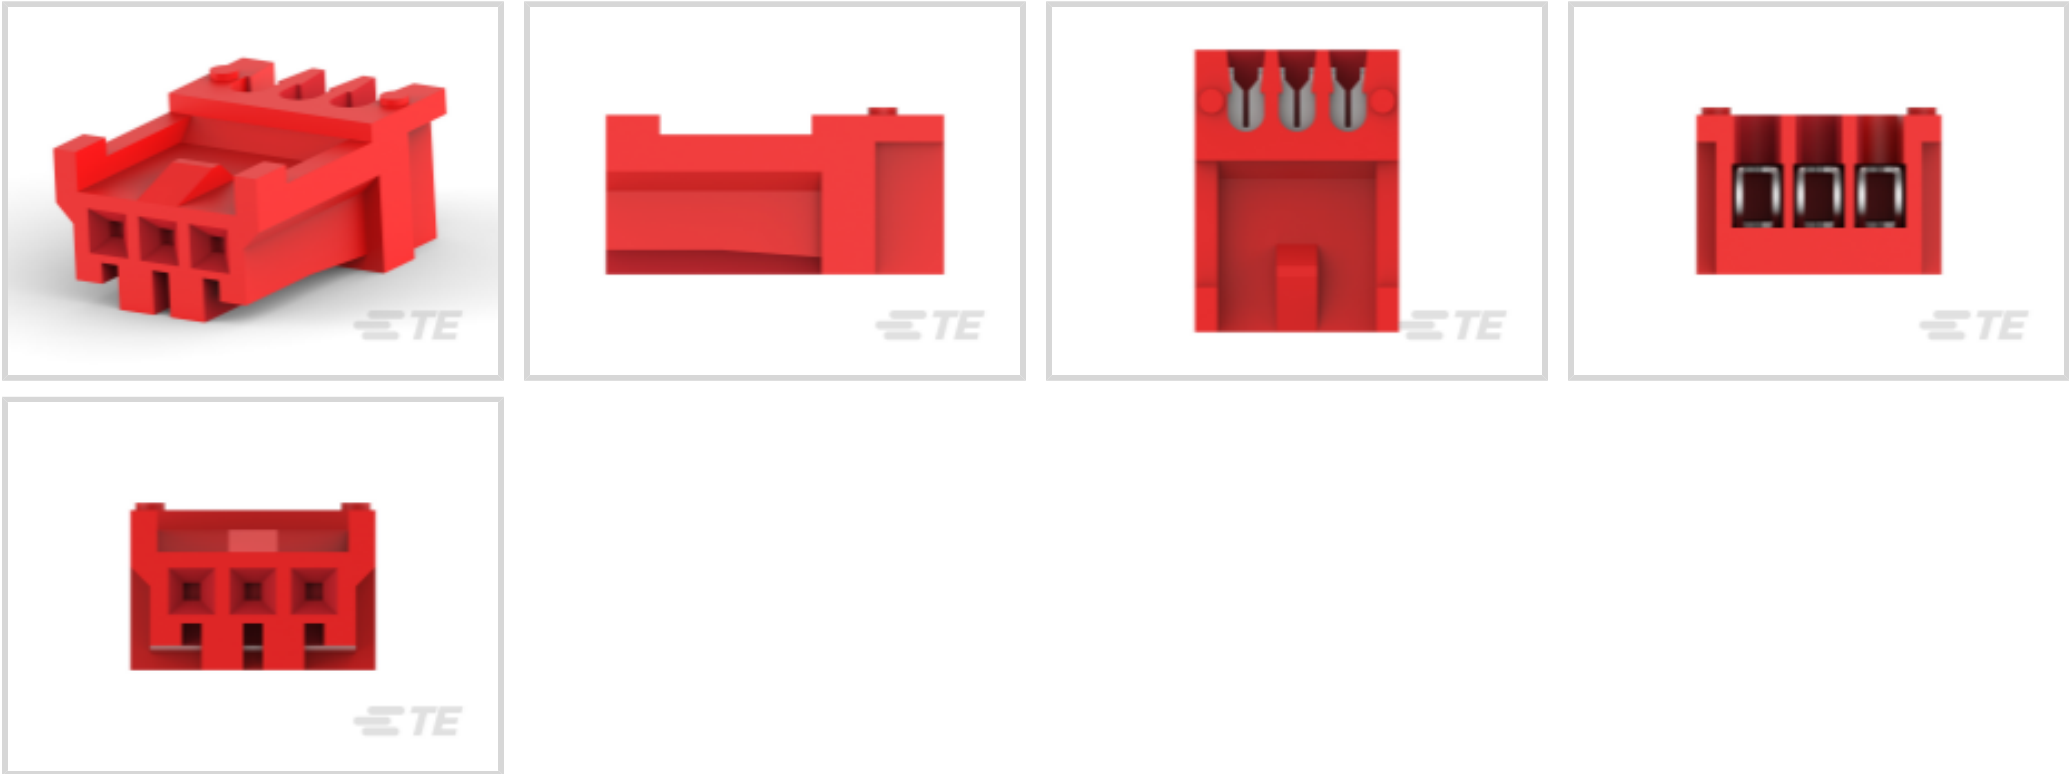

Connector Product Type: **Connector Assembly**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Board**
Number of Positions: **3**
Centerline (Pitch): **2.5 mm [.098 in]**

Features

Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Red
-----------------------	-----

Contact Features

--	--



Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Type	Socket
Contact Current Rating (Max)	3.5 A

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
Strain Relief	Without
Panel Mount Feature	Without
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon 66
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Compatible Insulation Diameter Range	1.1 – 1.5 mm[.043 – .059 in]
Connector Height	13.8 mm[.543 in]
Wire Size	22 AWG
Connector Length	10 mm[.394 in]

Usage Conditions

Operating Temperature Range	-20 – 95 °C[-4 – 203 °F]
-----------------------------	--------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL

Packaging Features

Packaging Method	Bag
Packaging Quantity	700



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Melamine (3% in 23466525738) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Also in the Series | MTEI

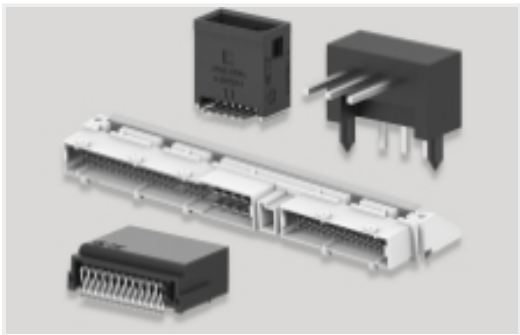

PCB Headers & Receptacles(3)



Wire-to-Board Connector Assemblies & Housings(53)

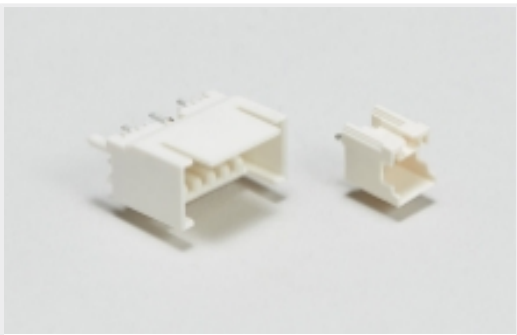

Wire-to-Board Headers & Receptacles (3)

Customers Also Bought



TE Part #60618-4
CMNL PIN PTPHBZL/P




TE Part #63931-1
187 FASTON REC 22-18 AWG TPBR



TE Part #1-215083-8
MICRO-MATCH MOW.18P



TE Part #2295226-1
THERMOCOUPLE CONNECTOR.
OPENER.



TE Part #322985
TERMINAL,PIDG SPD 12-10 6



TE Part #1-480426-0
04P CMNL CAP HSG F/H NATL



TE Part #1-2299959-1
TRAY PACKAGE.THERMOCOUPLE
CONN KTYPE REC



TE Part #2295205-1
THERMOCOUPLE CONNECTOR.
STRAIN RELIEF.



TE Part #320665
PG SPD 22-16 COMM 22-18 MIL 6



TE Part #L9000111-01
Antenna Dome 2.4GHz 1.32 216 UFL

Documents

Product Drawings

3P MTEI RCPT HSG ASY 22

English

3P MTEI RCPT HSG ASY 22

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_172051-3_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_172051-3_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_172051-3_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

1-1773972-5_EIS_Connectors_Brochure

English

Product Specifications

Terminating AMP MTEI Connector

English

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

Japanese

PISTOL TOOL, MTEI

Japanese

Instruction Sheet (non U.S.)

Japanese

Agency Approvals

Agency Approval Document

English