

PCN-105D3MHZ,001B

✓ ACTIVE

OEG | OEG Slimline PCB Relay PCN

TE Internal #: 1721441-2

General Purpose Power Relay, DC, Monostable, 1 Form A SPST-NO, 5 A Contact Rating, 5 VDC Coil Voltage, OEG Slimline PCB Relay PCN

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays > Slim PCB Relay, PCN 3A/5A, 5VDC



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A SPST-NO**

Contact Current Rating: **5 A**

[All Slim PCB Relay, PCN 3A/5A, 5VDC \(2\)](#)

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Special Features	Bifurcated/Twin Contacts
Contact Number of Poles	1
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form A SPST-NO

Electrical Characteristics

Contact Limiting Short-Time Current	3 A
Contact Limiting Making Current	3 A
Contact Limiting Continuous Current	3 A
Contact Limiting Breaking Current	3 A
Insulation Initial Dielectric Between Open Contacts	750 Vrms



Insulation Initial Dielectric Between Adjacent Contacts	750 Vrms
Coil Current	.024 A
Contact Switching Voltage (Max)	277 VAC
Contact Switching Load (Min)	100mA @ 5V
Coil Resistance	208 $\Omega$
Insulation Initial Resistance	1000 M $\Omega$
Contact Current Rating	5 A
Coil Voltage Rating	5 VDC
Contact Voltage Rating	30 VDC
Coil Power Rating DC	.12 W
Insulation Initial Dielectric Between Contacts & Coil	3000 Vrms

Body Features

Product Weight	3 g[.1058 oz]
Primary Product Color	White
Enclosure Type	Flux Resistant Automatic Solder Capable & Washable

Contact Features

Contact Plating Material	Gold
Contact Material	AgNi

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Dimensions

Insulation Clearance Between Contact & Coil	3.5 mm[.138 in]
Insulation Creepage Between Contact & Coil	3.5 mm[.138 in]
Product Width	5 mm[.196 in]
Product Length	20 mm[.787 in]
Product Height	12.5 mm[.492 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------



Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[185 °F]

Operation/Application

Solder Process	Wave Solder Capable
Shock Resistance	100G's, 11ms
Current Type	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Tube
------------------	------

Other

Coil Power Rating Class	.1 – .15 W
Contact Current Class	16 A
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	12 – 13 mm
Length Class (Mechanical)	16 – 20 mm
Width Class (Mechanical)	0 – 6 mm

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these




limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | OEG Slimline PCB Relay PCN

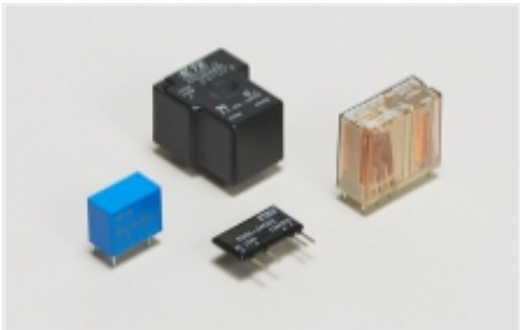

General Purpose Power Relays(11)

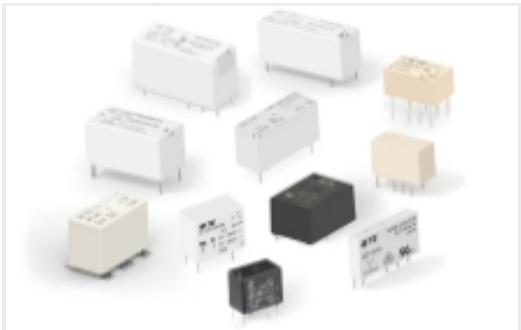

PCB Relays(11)


Customers Also Bought



TE Part #1-2355627-1  
DDR5 DIMM BLACK HSG AND NATRUAL LATCH




TE Part #1761008-3  
SFP 1X4 CAGE & LIGHT PIPE KIT

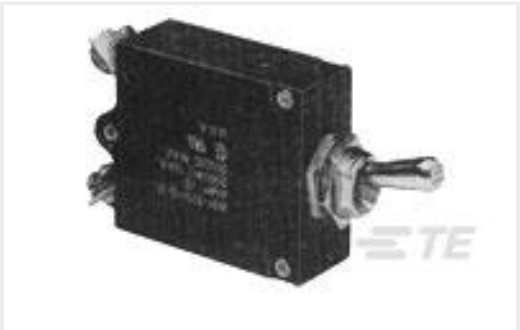

TE Part #3-1393247-3  
W31-X2M1G-15=W23/W31



TE Part #5646547-1  
Z-PACK A-B 25 COLUMN SHLD ASSY

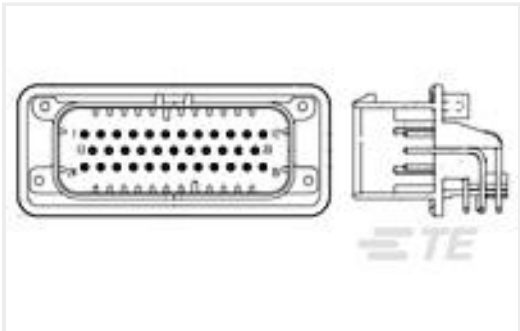

TE Part #1-776163-6  
35POS,PIN DIA 1.3,HDR ASSY,90DEG, COD 6



TE Part #2357739-1  
16G,05FH,REC,220PIN,4H,Hard Tray




TE Part #7-1622796-3  
YR1 0.1% 169K



TE Part #1473006-1  
SEMI HARD TRAY DDR SOCKET 200P



TE Part #178325-5  
DYNAMIC D3100D HDR V 10P ASSY SN

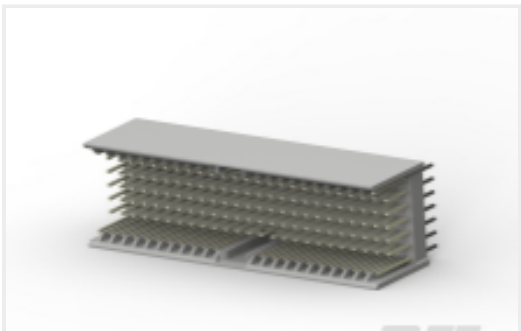

TE Part #5646529-1  
Z-PACK 2MM HM TYPE A/B 169P

Documents



CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1721441-2\\_L1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1721441-2\\_L1.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1721441-2\\_L1.2d\\_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PCN Series Relay Data Sheet English](#)

English

Product Specifications

[PCN PACKAGE SPECIFICATION](#)

English

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English