TE Internal #: 1761015-3

SFP, Cage Assembly, Signal, Operating Temperature Range -55 –


85 °C [-67 – 185 °F], Data Rate (Max) 4 Gb/s, 6 Ports, Port Matrix

Configuration 1 x 6

View on TE.com >



#### Connectors > Pluggable IO Connectors & Cages

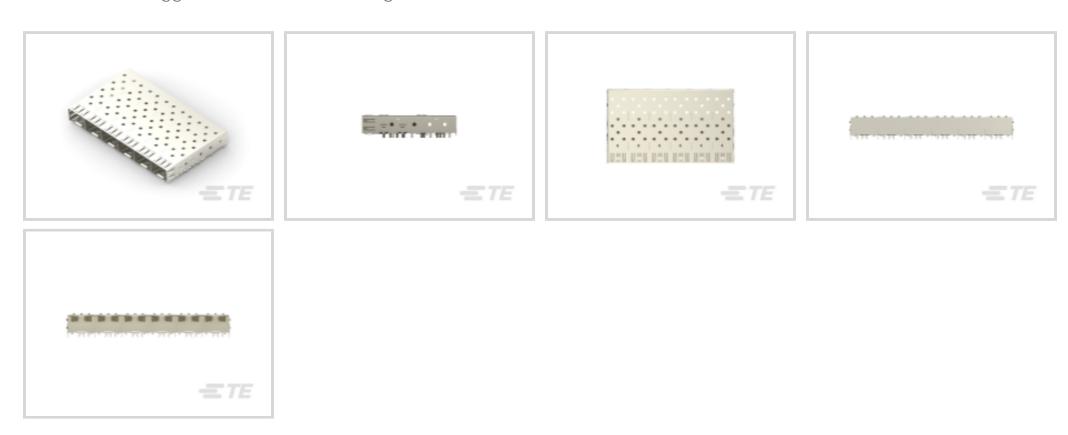

Form Factor: **SFP** 

Pluggable I/O Product Type: Cage Assembly

Sealable: No

Circuit Application: Signal

Operating Temperature Range: -55 - 85 °C [ -67 - 185 °F ]

## **Features**

## Product Type Features

Cage Type	Ganged
Form Factor	SFP
Pluggable I/O Product Type	Cage Assembly
Sealable	No
Configuration Features	
Number of Ports	6
Port Matrix Configuration	1 x 6
Electrical Characteristics	
Data Rate (Max)	4 Gb/s
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit

-55 - 85 °C[-67 - 185 °F]

Operating Temperature Range

**Usage Conditions** 



Pluggable I/O Applications	SFP
Circuit Application	Signal
Other	
Included Lightpipe	No
EMI Containment Feature Type	Internal/External EMI Springs

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts





## Customers Also Bought



TE Part #3-5353652-9 .5FHP08H,440,B,GIG,30/Sn,HT,NSYes TE Part #2375348-1 QSFP-DD 1X2, W/ EXTRUDED CUTOM HS



TE Part #1376247-1 40 POS. MCC AND SHROUD KEY KIT TE Part #6645496-9
Z-PACK HM 2MM HDR TYPE A ASSY

TE Part #1554570-3 MODULE FEMALE GUIDE, UNIVERSAL POWER TE Part #2379636-1 HEAT SINK KIT,CUST QSFP-DD,

TE Part #1746790-2 GROUND RETURN LOWER SHIELD TYPE A,PB-FRE TE Part #1554570-2 MODULE FEMALE GUIDE, UNIVERSAL POWER

## **Documents**

Product Drawings

SFP 1X6 CAGE ASSY W/ KAPTON TAPE, PF

English

**CAD Files** 

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1761015-3\_F.2d\_dxf.zip

SFP, Cage Assembly, Signal, Operating Temperature Range -55 – 85 °C [-67 – 185 °F], Data Rate (Max) 4 Gb/s, 6 Ports, Port Matrix Configuration 1 x 6



English

**Customer View Model** 

ENG\_CVM\_CVM\_1761015-3\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1761015-3\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English