



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Tab**
Connector & Housing Type: **Tab Housing**
Number of Positions: **4**
Terminal Orientation: **Straight**
Primary Product Color: **Natural**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Sealable	No
Connector & Housing Type	Tab Housing

Configuration Features

Number of Positions	4
---------------------	---

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Terminal Type	Tab
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

Mating Retention Type	Latch
-----------------------	-------



Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon
Centerline (Pitch)	5.5 mm[.216 in]

Dimensions

Product Length	25 mm[.98 in]
----------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
-----------------------------	----------------------------

Packaging Features

Packaging Quantity	100
--------------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




Compatible Parts




TE Part # 176992-1
250 DBL LOCK CAP IKEI 2P NAT



TE Part # 171260-3
FF 250 TAB HSG 12P NYLON BLACK




TE Part # 178001-1
250 DBL LOCK CAP IKEI 3P NAT



TE Part # 178004-2
FF 250 PLUG HSG 4P NYLON BLACK




TE Part # 176986-1
FF 250 PLUG HSG 1P NYLON NAT




TE Part # 171260-2
FF 250 TAB HSG 12P NYLON BLACK


Also in the Series | FASTIN-FASTON 250

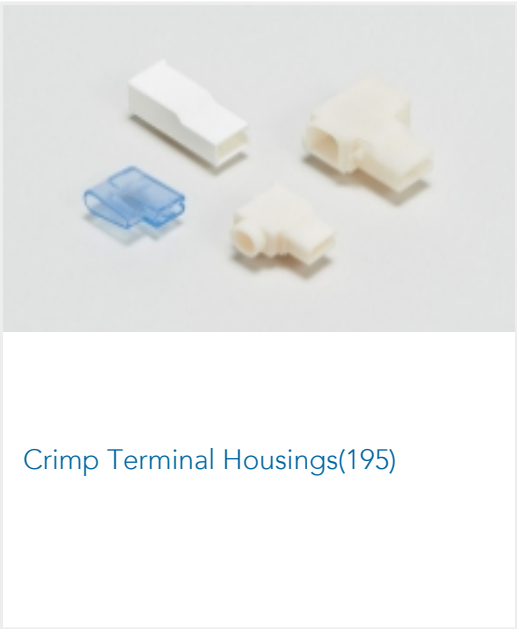

Crimp Terminal Housings(195)

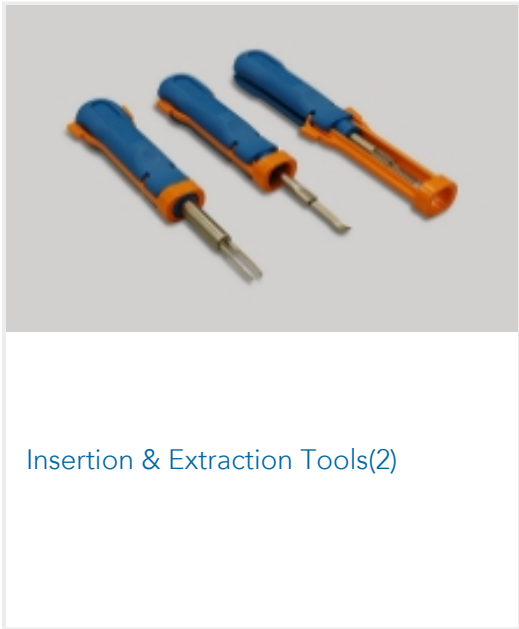

Insertion & Extraction Tools(2)

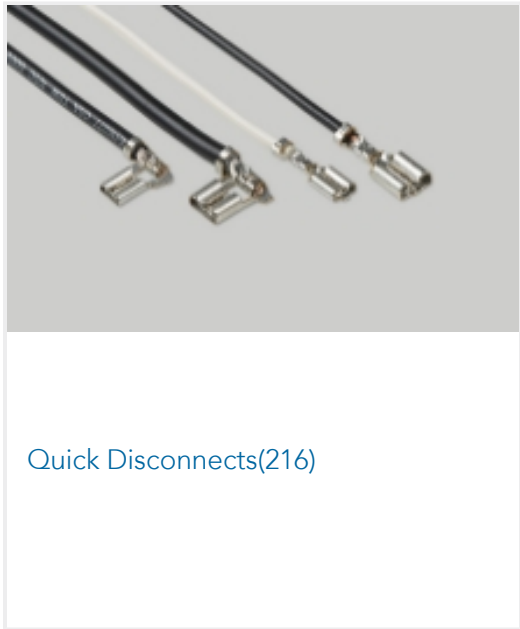

Quick Disconnects(216)

Customers Also Bought



TE Part #2013031-2
0.50 SERIES 24POS PLUG ASSY



TE Part #CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM, HOUSING



TE Part #2069957-1
0.50/1.0 SEALED WIRE COVER 140P TYPE-II



TE Part #178448-2
EJ-2 DBL LOCK PLUG 2P ASSY B



TE Part #2040009-1
0.50/1.0 SEALED WIRE COVER ASSY
60POS

TE Part #2260814-1
WIRE COVER ASSY 62POS 0.5/1.0
SERIES

TE Part #1981561-2
0.50 SERIES CAVITY PLUG

TE Part #1612288-1
SEALED 0.64/2.3II 60POS LEVER

Documents

Product Drawings

FF 250 PLUG HSG 4P NYLON NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_178004-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_178004-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_178004-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

White Paper: Nylon Discoloration

English

Product Specifications

Application Specification

English