




Connectors > Connector Accessories > Connector Hardware

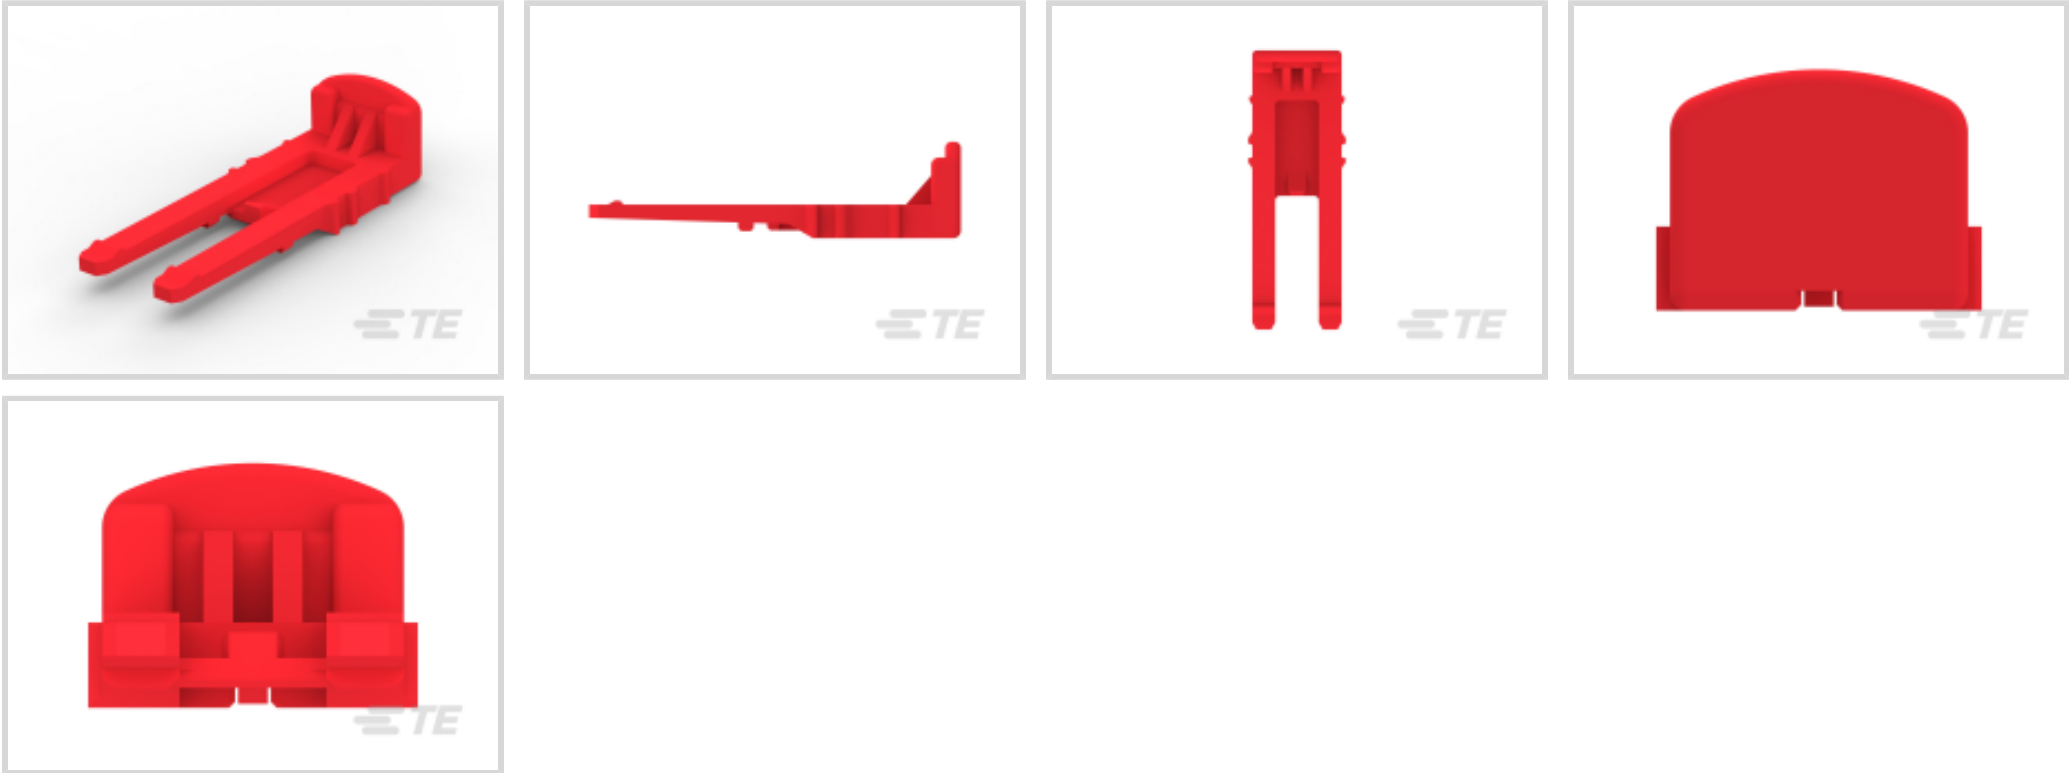

Connector Hardware Accessory Type: CPA (Connector Position Assurance)

Primary Product Color: Red

Primary Product Material: Glass-Filled Nylon

Operating Temperature (Max): 150 °C [302 °F]

Operating Temperature Range: -55 – 150 °C [-67 – 302 °F]

Features

Product Type Features

Connector Hardware Accessory Type	CPA (Connector Position Assurance)
Hardware Accessory Function	Position Assurance

Body Features

Primary Product Color	Red
Primary Product Material	Glass-Filled Nylon

Dimensions

Product Length	23.7 mm
Product Height	6.14 mm

Usage Conditions

Operating Temperature (Max)	150 °C[302 °F]
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	High Temperature Part - Not Glow Wire



Packaging Features

Packaging Method	Bag
Packaging Quantity	4500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-2232263-1
PTL 1X2 CAP PANEL MT HOT WIRE KEY A BLK



TE Part # 2-2232265-1
PTL 1X2 PLUG HSG HOT WIRE KEY B NAT



TE Part # CAT-P87074-P729A
High Temperature Plug — POWER TRIPLE LOCK



TE Part # 5-2232362-3
PTL MFBL 1X3 PLUG HSG GLW WIRE NAT



Also in the Series

Power Triple Lock


Connector Contacts(26)	Connector Hardware(12)	Insertion & Extraction Tools(1)	PCB Headers & Receptacles(21)



Power Contacts(26)



Rectangular Power Connectors(301)

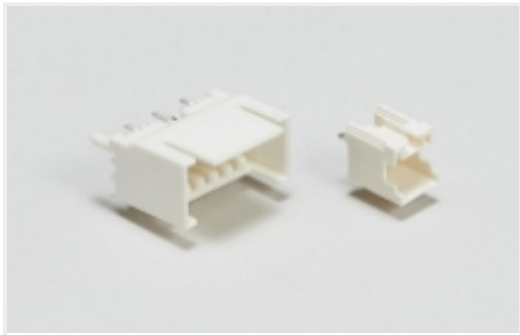

Wire-to-Board Headers & Receptacles (21)

Customers Also Bought



TE Part #CAT-P87074-P729
POWER TRIPLE LOCK Plug, Standard Temperature



TE Part #CAT-P87074-C1701A
POWER TRIPLE LOCK High Temperature Caps



TE Part #4-1971782-2
PTL TAB CONTACT LP, 14 AWG



TE Part #5-1971776-4
PTL 2X4 PLUG HSG HIGH TEMP KEY A LGR



TE Part #CAT-P87074-T669
Locking Plate, POWER TRIPLE LOCK, TPA



TE Part #1-1971772-2
PTL 1X2 CAP PANEL MT STD TEMP KEY A NAT

Documents

Product Drawings

CPA

English

CAD Files

Customer View Model

ENG_CVM_CVM_1971789-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1971789-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1971789-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

Make First, Break Last Power Triple Lock Connector

English

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Application Specification

English