



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories



Conducting Accessory Type: **Jumper Bar**

Number of Poles: **10**

PCB Mount Retention Type: **Screw Mount**

Product Spacing: **26 mm [ 1.024 in ]**

Contact Current Rating (Max): **232 A**

Features

Product Type Features

|                           |            |
|---------------------------|------------|
| Conducting Accessory Type | Jumper Bar |
|---------------------------|------------|

Configuration Features

|                 |    |
|-----------------|----|
| Number of Poles | 10 |
|-----------------|----|

Electrical Characteristics

|                                                          |         |
|----------------------------------------------------------|---------|
| Power Loss                                               | 7.4 W   |
| Dielectric Withstanding Voltage (Max)                    | 3500 V  |
| Operating Voltage Rating (UL & CSA) (Max) - Main Circuit | 600 V   |
| Impulse Withstanding Voltage Rating (IEC)                | 8000 V  |
| Current Rating (IEC)                                     | 232 A   |
| Current Rating (UL)                                      | 230 A   |
| Current Rating (CSA)                                     | 230 A   |
| Voltage Rating (IEC)                                     | 1000 V  |
| Voltage Rating (CSA)                                     | 600 V   |
| Short-Time Withstanding Current Rating @ 1s              | 11400 A |



Body Features

|                |                   |
|----------------|-------------------|
| Product Weight | 241.5 g[8.518 oz] |
|----------------|-------------------|

Contact Features

|                              |       |
|------------------------------|-------|
| Contact Current Rating (Max) | 232 A |
|------------------------------|-------|

Mechanical Attachment

|                          |             |
|--------------------------|-------------|
| Tightening Torque        | 17.7 in-lbs |
| PCB Mount Retention Type | Screw Mount |

Dimensions

|                 |                  |
|-----------------|------------------|
| Product Width   | 26 mm[1.024 in]  |
| Product Depth   | 20.7 mm[.815 in] |
| Product Height  | 250 mm[9.84 in]  |
| Tool Size       | 4 mm[.157 in]    |
| Product Spacing | 26 mm[1.024 in]  |

Usage Conditions

|                                |                            |
|--------------------------------|----------------------------|
| Installation Temperature Range | -5 – 40 °C[23 – 104 °F]    |
| Operating Temperature Range    | -55 – 110 °C[-67 – 230 °F] |

Industry Standards

|           |      |
|-----------|------|
| IP Rating | IP20 |
|-----------|------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                            |
| Solder Process Capability                     | Not reviewed for solder process capability                                                                                     |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1SNK526060R0000  
ZS95-YL



TE Part # 1SNA400370R2400  
D95/26



TE Part # 1SNA400791R0000  
D95/26.YL



TE Part # 1SNK526020R0000  
ZS95-BL




TE Part # 1SNA400371R1100  
D95/26.N



TE Part # 1SNK526010R0000  
ZS95


Also in the Series | ENTRELEC SNK

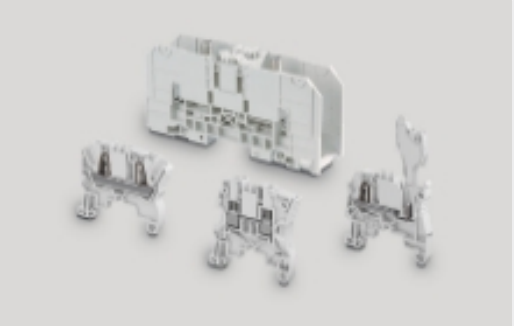

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)

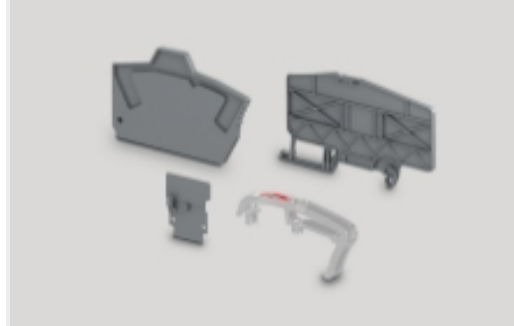

Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought

1SNK926310R0000

Jumper Bar, 10 Pole, 26 mm [1.024 in] Spacing, -55 – 110 °C [-67 – 230 °F], ENTRELEC  
SNK



TE Part #102387-4  
20 MODIV HSG COMP DR .100 POL

TE Part #34313  
PIDG HK 22-16 COMM 22-18 MIL 6

TE Part #CAT-ABS-DBL  
DBL Power Distribution Block: Screw clamp technology, 1 to 3 poles

TE Part #66570-8  
20 DF PIN CONT, SMALL PACK

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1SNK926310R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK926310R0000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK926310R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

JB26-10

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese