



CII

TE Internal #: 2-1617749-1

General Purpose Power Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 10 A Contact Rating, 28 VDC Coil Voltage, Socket Mount, Hermetically Sealed

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Polarized, Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Contact Current Rating: **10 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Coil Special Features	Coil Suppression Diode
Relay Options	Back EMF Suppression
Contact Arrangement	2 Form C DPDT-CO

Electrical Characteristics

Coil Resistance	320 Ω
Contact Current Rating	10 A
Coil Voltage Rating	28 VDC

Body Features

Enclosure Type	Hermetically Sealed
----------------	---------------------

Contact Features

Contact Material	Silver Cadmium Oxide
Terminal Plating	Gold

Termination Features

Main Termination & Connection Type	Socket Pins
Coil Termination & Connection Type	Socket Pins



Mechanical Attachment

Product Mounting Feature Type	Mounting Brackets
Product Mount Type	Socket Mount

Usage Conditions

Operating Temperature Range	-70 – 125 °C[-94 – 257 °F]
Environmental Ambient Temperature (Max)	125 °C[257 °F]

Operation/Application

Vibration Resistance	30G's, 10 – 3000Hz
Shock Resistance	200G's, 6ms
Current Type	DC
Coil Magnetic System	Polarized, Monostable

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Cd (15% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 7-1617816-4 FCAC-325-AY2	 TE Part # 4-1617785-8 FCA-410-1515M=M83536/15-015M	 TE Part # 7-1617785-0 FCA-410-1530L=M83536/15-030L	 TE Part # 1-1617786-9 FCA-410-1633L=M83536/16-033L
 TE Part # 2-1617805-4 TD228-3002P=TDFO 30 SEC M83726 /28-3002P	 TE Part # 9-1617785-3 FCA-410-1610M=M83536/16-010M	 TE Part # 4-1617785-0 FCA-410-1511L=M83536/15-011L	 TE Part # 8-1617785-5 FCA-410-1606M=M83536/16-006M
 TE Part # 3-1617806-2 FCA-415-CX4	 TE Part # 8-1617755-6 FCA-410-BW3	 TE Part # 1617754-8 FCA-410-1602M=M83536/16-002M	 TE Part # 2-1617754-7 FCA-410-1634M=M83536/16-034M
 TE Part # 1-1617754-1 FCA-410-1614M=M83536/16-014M	 TE Part # 2-1617785-1 FCA-410-1501M=M83536/15-001M	 TE Part # 2-1617785-9 FCA-410-1505M=M83536/15-005M	 TE Part # 3-1617785-3 FCA-410-1507M=M83536/15-007M





TE Part # 1617786-7
FCA-410-1623L=M83536/16-023L



TE Part # 1-1617756-0
FCA-410-DY9



TE Part # 7-1617785-8
FCA-410-1603L=M83536/16-003L



TE Part # 5-1617805-6
TD229-2001P=TD2FR 2 SEC M83726/29-2001P

Customers Also Bought



TE Part #797859-000
82A0121-24-0/9




TE Part #6-1617794-1
TD230-1001P=TD2AO .1-1 SECM83726/30-1001P




TE Part #2-1617754-1
FCA-410-1622M=M83536/16-022M




TE Part #REBC210E-1004CB
REBC210E-1004CB=RELAY

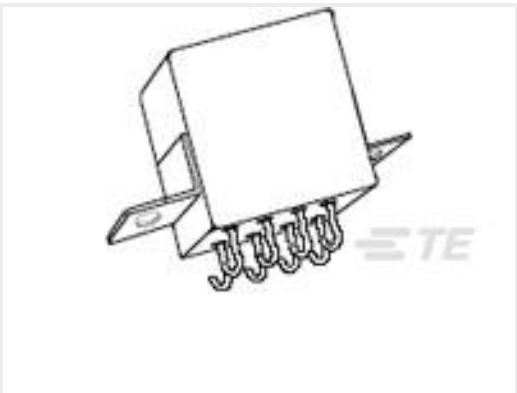

TE Part #9-1617748-7
FCA-210-0923L=M83536/9-023L

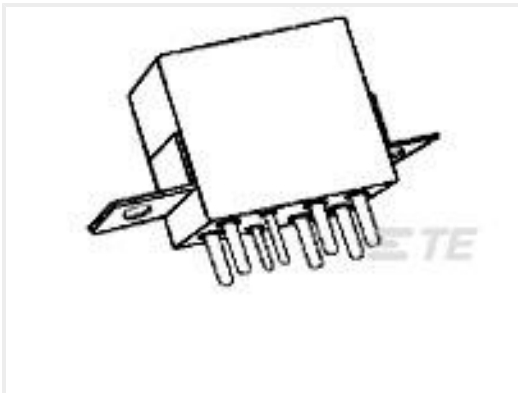

TE Part #5-1617758-0
FCB-205-0224M=M83536/2-024M

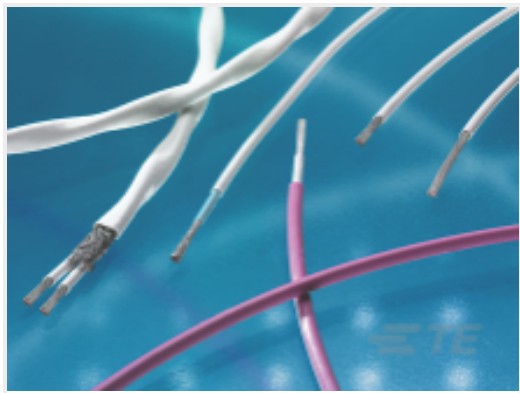

TE Part #CAT-82A-TC-T-26
SPEC 80 Twisted Pair Cable: FlexLine Cable, Tin Coated, 26 AWG



TE Part #CX0358-000
55PC1221-22-0/9-9



TE Part #2358899-3
conn .assy ,plug ,FO, MTsize15, 4cav

Documents

- CAD Files
- 3D PDF
- 3D
- Customer View Model
- ENG_CVM_CVM_2-1617749-1_A.2d_dxf.zip
- English
- Customer View Model
- ENG_CVM_CVM_2-1617749-1_A.3d_igs.zip
- English



Customer View Model

[ENG_CVM_CVM_2-1617749-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[5-1773450-5_sec5_FCA-210](#)

English