PIDG

TE Internal #: 2-320564-1


Closed Ring Tongue Terminal, 16 AWG, 3/8 / M12 Stud, 12.7 mm [. 5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially

Insulated, PIDG

View on TE.com >



Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

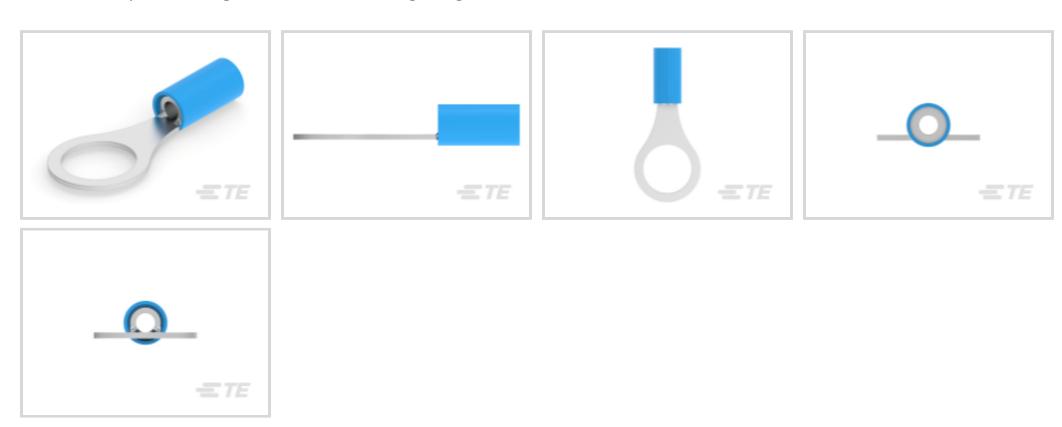

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2800 CMA
Stud Size: 3/8, M12

Stud Diameter: 12.7 mm [.5 in]

All PIDG Ring Tongue Terminals (410)

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	3/8, M12
Sealable	No
Wire Insulation Support Retention Type	Insulation Restriction
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Product Weight	1.379 g
Stripe Color	Blue
Contact Features	
Military Part Class	Class I



Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	2800 CMA
Stud Diameter	12.7 mm[.5 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	32.5 mm[1.28 in]
Compatible Insulation Diameter (Max)	3.3 mm[.13 in]
Compatible Insulation Diameter Range	1.6 – 3.3 mm[.063 – .13 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	Yes
Packaging Features	
Packaging Quantity	500
Packaging Method	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC



Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






DIES PIDG 22-16 DIE SET















Also in the Series | PIDG





Crimp Wire Pins, Tabs & Ferrules(41)




Hand Crimping Tools(2)




Knife Disconnects(11)













Customers Also Bought











Documents

Product Drawings

TERMINAL, PIDG R IR 16 3/8

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-320564-1_T.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-320564-1_T.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-320564-1_T.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Closed Ring Tongue Terminal, 16 AWG, 3/8 / M12 Stud, 12.7 mm [.5 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated, PIDG



Agency Approvals
CSA Certificate

English