



SFP28

TE Internal #: 2169678-5  
SFP+, Cage Assembly with Integrated Connector, .8mm [.032in]  
Centerline, Sealable, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 °F]

[View on TE.com >](#)

Connectors > Pluggable IO Connectors & Cages > SFP+ Stacked Cage Assemblies



Form Factor: **SFP+**  
Pluggable I/O Product Type: **Cage Assembly with Integrated Connector**  
Centerline (Pitch): **.8 mm [ .032 in ]**  
Sealable: **Yes**  
Circuit Application: **Signal**

[All SFP+ Stacked Cage Assemblies \(73\)](#)

Features

Product Type Features

Cage Type	Stacked
Form Factor	SFP+
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Sealable	Yes

Configuration Features

Number of Positions	200
Number of Ports	10
Port Matrix Configuration	2 x 5

Electrical Characteristics

Data Rate (Max)	16 Gb/s
-----------------	---------

Contact Features

Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
Tail Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 µm

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------



Termination Post & Tail Length	3 mm[.118 in]
--------------------------------	---------------

Housing Features

Cage Material	Nickel Silver
Centerline (Pitch)	.8 mm[.032 in]

Dimensions

PCB Thickness (Recommended)	1.5 mm[.059 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Pluggable I/O Applications	SFP+
Heat Sink Compatible	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Package
------------------	---------

Other

Included Lightpipe	Yes
EMI Containment Feature Type	Elastomeric Gasket

Product Compliance

For compliance documentation, visit the product page on TE.com>

















EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 <p>TE Part # 4-2821222-5 SFP56 DIRECT ATTACH CA, 2M, 30AWG</p>	 <p>TE Part # CAT-C11-N4901114 SFP28 to SFP28 Cable Assembly: 30 AWG</p>	 <p>TE Part # 2142970-7 CABLE ASSY, MICRO SFP+ TO STD SFP+, 6M</p>	 <p>TE Part # 2018280-6 KIT, SEAT TL SFP PLUS 2X5</p>
 <p>TE Part # CAT-C11-H5062 SFP+ to SFP+ I/O Cable Assembly: 28 AWG</p>	 <p>TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG</p>	 <p>TE Part # 2142970-4 CABLE ASSY, MICRO SFP+ TO STD SFP+, 3M</p>	 <p>TE Part # 2142970-2 CABLE ASSY, MICRO SFP+ TO STD SFP+, 1M</p>
 <p>TE Part # CAT-C11-N49011 SFP28 to SFP28 Cable Assembly: 26 AWG</p>	 <p>TE Part # 4-2821224-5 SFP56 DIRECT ATTACH CA, 3M, 26AWG</p>	 <p>TE Part # CAT-Q17-N49011 QSFP56-Four SFP56 Cable Assembly: 30 AWG</p>	 <p>TE Part # CAT-C11-H506 SFP+ to SFP+ I/O Cable Assembly: 26 AWG</p>
 <p>TE Part # 2821033-8 QSFP TO [4]SFP+, 28G, 1M, 33AWG</p>	 <p>TE Part # 2142970-6 CABLE ASSY, MICRO SFP+ TO STD SFP+, 5M</p>	 <p>TE Part # 2142970-5 CABLE ASSY, MICRO SFP+ TO STD SFP+, 4M</p>	 <p>TE Part # CAT-C11-H50626 SFP+ to SFP+ I/O Cable Assembly: 30 AWG</p>



TE Part # 2142970-1  
CABLE ASSY, MICRO SFP+ TO STD SFP+, 0.5M



TE Part # 4-2334985-2  
SFP56 DIRECT ATTACH CA, 1M, 32AWG

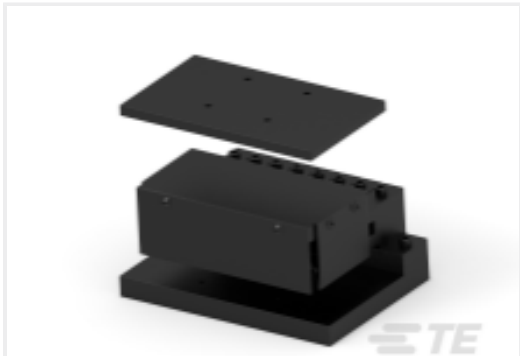


TE Part # 2063048-6  
SFP EXTRACTION KIT ASM, 8 POS



TE Part # 2142970-3  
CABLE ASSY, MICRO SFP+ TO STD SFP+, 2M

Customers Also Bought

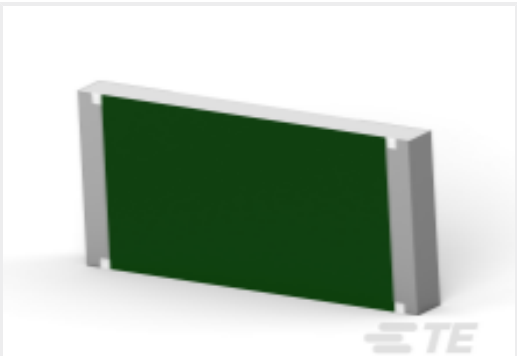

TE Part #4-2176403-9  
3550 100R 1%

Documents

Product Drawings

SFP+assy 2x5 Gasket 4 LP Sn

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2169678-5\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2169678-5\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2169678-5\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)



English