

zQSFP+/QSFP28

TE Internal #: 2214565-1 zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Sealable, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 °F]

View on TE.com >

Connectors > Pluggable IO Connectors & Cages



Form Factor: **zQSFP+**

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Centerline (Pitch): .8 mm [.032 in]

Sealable: Yes

Circuit Application: Signal

Features

Product Type Features

Cage Туре	Stacked
Form Factor	zQSFP+
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Sealable	Yes
Configuration Features	
Number of Rear EONs per Port Column	3
Number of Positions	190
Number of Ports	6
Port Matrix Configuration	2 x 3
Electrical Characteristics	
Data Rate (Max)	28 Gb/s
Contact Features	
Contact Current Rating (Max)	.5 A
Contact Underplating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
PCB Contact Termination Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]



2214565-1

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Sealable, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 °F]



Termination Features

Termination Post & Tail Length

Housing Features

Cage Material

Centerline (Pitch)

Dimensions

PCB Thickness (Recommended)

Usage Conditions

Operating Temperature Range

Operation/Application

Pluggable I/O Applications

Heat Sink Compatible

Circuit Application

Industry Standards

UL Flammability Rating

Through Hole - Press-Fit 2 mm[.079 in]

Nickel Silver

.8 mm[.032 in]

1.57 mm[.062 in]

-55 – 105 °C[-67 – 221 °F]

SFP+ Stacked Belly-to-Belly

No

Signal

UL 94V-0

Packaging Features

Packaging Method	Box & Tray
Other	
Included Lightpipe	No
EMI Containment Feature Type	Elastomeric Gasket
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

2214565-1

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Sealable, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 °F]



Free


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

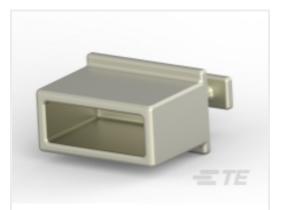


TE Part # 1888810-2 EMI/Dust Cover,XFP And QSFP




TE Part # 1551920-2 zQSFP+ connector assembly

Also in the Series | zQSFP+/QSFP28

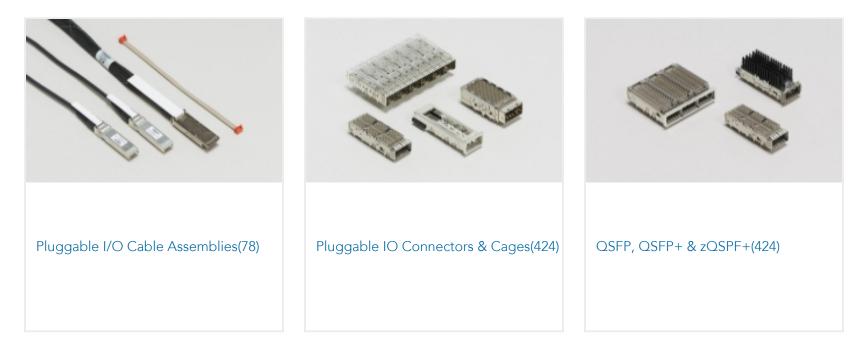

Customers Also Bought

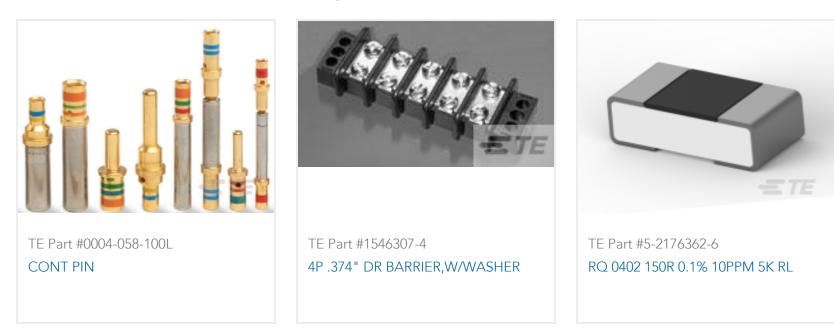

2214565-1

zQSFP+, Cage Assembly with Integrated Connector, .8mm [.032in] Centerline, Sealable, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 °F]



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2214565-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2214565-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2214565-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications Product Specification

English