

Neohm | Neohm R

TE Internal #: 3-1622796-0 4.75K ohm, Through-Hole Precision Resistor, Thin Film, .25 W, .1 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 6.3 x 2.3 mm, Ammo Packed, Neohm R

View on TE.com >

Passive Components > Resistors > Through-Hole Resistors



Resistance Value: 4.75K Ω

Resistor Type: Precision Resistor

Element Type: Thin Film

Power Rating: .25 W

Resistance Class: $1k\Omega - 1M\Omega$

Features

Product Type Features

Resistor Type

Element Type

E

Precision Resistor

Thin Film

1

Configuration Features

Number of Resistors

Electrical Characteristics

Operating Voltage	250 V
Resistance Value	4.75Κ Ω
Power Rating	.25 W
Resistance Class	$1k\Omega - 1M\Omega$
Passive Component Tolerance	.1 %
Body Features	
Lead Type	Axial-Leaded
Termination Features	
Termination Area Base Material	Copper
Number of Terminations	2
Dimensions	
Passive Component Dimensions	6.3 x 2.3 mm

YR1B4K75CC

4.75K ohm, Through-Hole Precision Resistor, Thin Film, .25 W, .1 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 6.3 x 2.3 mm, Ammo Packed, Neohm R



Usage Conditions

Operating Temperature Range	-65 – 155 °C
Temperature Coefficient	±15 ppm/°C
Packaging Features	
Packaging Method	Ammo Packed
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

YR1B4K75CC

4.75K ohm, Through-Hole Precision Resistor, Thin Film, .25 W, .1 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 6.3 x 2.3 mm, Ammo Packed, Neohm R








Also in the Series | Neohm R





Customers Also Bought

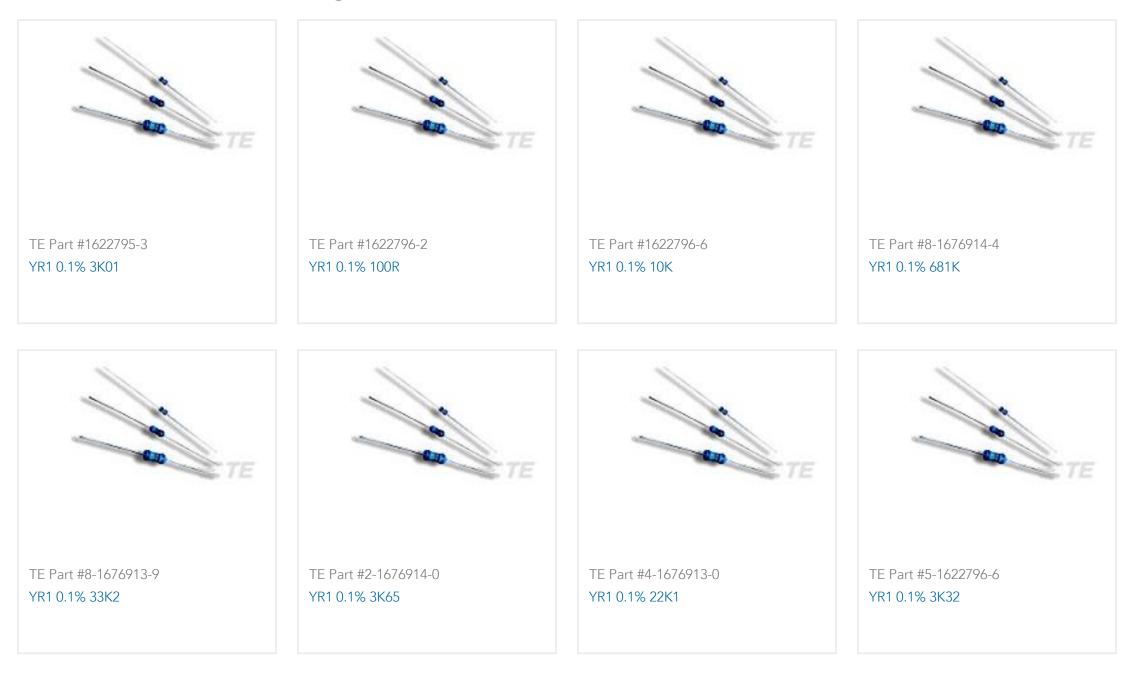

YR1B4K75CC

4.75K ohm, Through-Hole Precision Resistor, Thin Film, .25 W, .1 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 6.3 x 2.3 mm, Ammo Packed, Neohm R





Documents

Product Drawings YR1 0.1% 4K75

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1622796-0_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1622796-0_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1622796-0_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1309350_PASSIVE_COMPONENT

English

Precision Metal Film Fixed Resistors - Type R Series

English