



Terminals & Splices > PCB Terminals



PCB Terminal Type: **Receptacle**

PCB Thickness (Recommended): **1.57 mm [.062 in]**

PCB Hole Diameter: **1.83 mm [.072 in]**

Profile Height from PCB: **10.21 mm [.402 in]**

Compatible Insulation Diameter (Max): **2.54 mm [.1 in]**

Features

Product Type Features

Wire Insulation Support Retention Type	Open Barrel
--	-------------

Contact Features

Contact Mating Area Plating Material Thickness	3.81 μm[150 μin]
PCB Terminal Type	Receptacle
Terminal Plating Material	Tin
Contact Underplating Material	None
Terminal Size	Miniature
Terminal Orientation	Straight

Termination Features

Termination Method to PCB	Through Hole - Solder
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions



Extension Below Board	2.29 mm[.09 in]
Terminal Material Thickness	.25 mm[.01 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Hole Diameter	1.83 mm[.072 in]
Profile Height from PCB	10.21 mm[.402 in]
Compatible Insulation Diameter (Max)	2.54 mm[.1 in]
Compatible Insulation Diameter Range	2.54 mm[.1 in]
Wire Size	.3 – .6 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Packaging Features

Packaging Quantity	9000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 TE Part # 3-350566-1 MINI AMP-IN 22-18 PTLPHBZ	 TE Part # 170338-1 AMP-IN 22-18 AWG	 TE Part # 3-770565-2 MINI AMP-IN 22-18 AWG LF	 TE Part # 3-770565-1 MINI AMP-IN 22-18 AWG SN/BRASS LF
 TE Part # 154645-2 AMP-IN TERMINAL	 TE Part # 170072-1 AMP-IN 24-20 AWG	 TE Part # 3-640401-1 MINI AMP-IN 26-22 SN/PHBZ	 TE Part # 350566-3 MINI AMP-IN 22-18 PTPBR
 TE Part # 3-640108-1 AMP-IN, MINI 26-22 008PTLPHBZ			

Customers Also Bought

 TE Part #204814-1 GROUNDING CONN. 34 POS. ASY.	 TE Part #AS212-35PN RECEPT.BOX MTG.TYPE 2	 TE Part #1-1617146-1 JMGACD-26LW = M39016/18-042L	 TE Part #CTJ-3D-05 RAIL ASSY
---	--	--	-------------------------------------



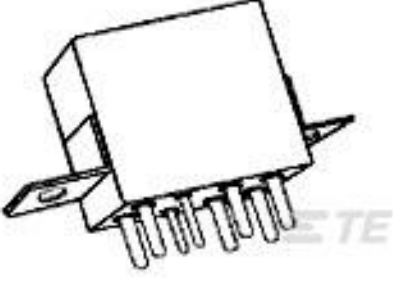


TE Part #4-1617758-9
[FCB-205-0224L=M83536/2-024L](#)



TE Part #ASDD208-11PN
[RECEPT ASSY.2 HOLE. TYPE 2. AS DOUBLE DE](#)

TE Part #1616059-1
[A876K=RELAY](#)

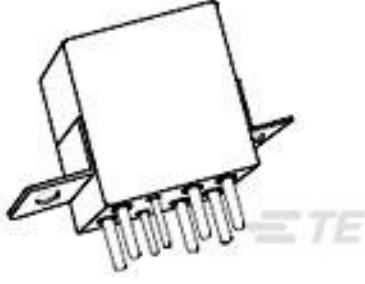

TE Part #1617749
[FCA-210-0924M=M83536/9-024M](#)

TE Part #91314-1
[POSITIONER,SP867](#)

TE Part #1423888-4
[W58-X1008-10=CKTBKR,THERM,PB,S](#)

Documents

Product Drawings

[AMP-IN TERM IS 22-20 010PTBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-42642-3_BC_c-3-42642-3-bc.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-42642-3_BC_c-3-42642-3-bc.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-42642-3_BC_c-3-42642-3-bc.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English