

#### Buchanan | BUCHANAN NC6

TE Internal #: 4-1437664-1

8 Position Barrier Strip, Dual Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 9.53 mm [.375 in] Centerline, 1 Row, **BUCHANAN NC6** 

View on TE.com >




Connectors > Terminal Blocks & Strips > Barrier Strips











Number of Positions: 8

Barrier Strip Style: **Dual Barrier** 

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board Centerline (Pitch): 9.53 mm [.375 in]

### **Features**

Product Type Features	
Block Style	Flat Bottom with standoffs
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Levels	1
Number of Positions	8
Number of Rows	1
Electrical Characteristics	
Operating Voltage	300 V
Body Features	
Terminal Profile	Low
Primary Product Color	Black

Vertical

Dual Barrier

**Product Orientation** 

Barrier Strip Style



#### **Contact Features**

Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	20 A
Termination Features	

#### Bottom Termination Type

Bottom Termination Type	Printed Circuit Pin
Mechanical Attachment	
Ton Tormination Type	Wire Clamp Combo Hoad

Top Termination Type	Wire Clamp Combo Head
Mounting Options	None
Screw Plating Material	Zinc
Screw Material	Steel
Thread Size	6-32
Screw Head Type	Wire Clamp Combo Head
Connector Mounting Type	Board Mount

#### **Housing Features**

Housing Material	Polyamide
Centerline (Pitch)	9.53 mm[.375 in]

#### **Dimensions**

Product Length	77.75 mm[3.061 in]
Wire Size	22 – 12 AWG

#### **Usage Conditions**

O .: T	40 405 005 40 004 051
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]

#### Operation/Application

Circuit Application	Power	

# **Industry Standards**

UL Flammability Rating	UL 94V-0	

#### **Packaging Features**

Packaging Method	Package
Packaging Quantity	240

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Also in the Series | BUCHANAN NC6



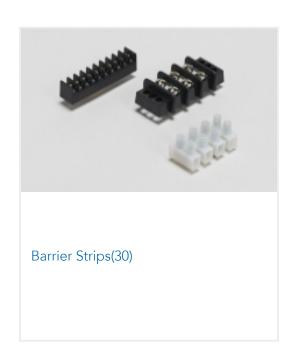

# Customers Also Bought



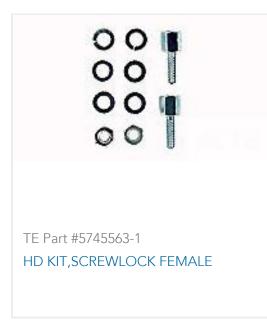

















#### **Documents**

#### **Product Drawings**

NC6-P108-08=NC6 ASSEMBLY

English

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_4-1437664-1\_M1.3d\_stp.zip

English

**Customer View Model** 

8 Position Barrier Strip, Dual Barrier, Printed Circuit Pin Bottom Termination, Wire-to-Board, 9.53 mm [.375 in] Centerline, 1 Row, BUCHANAN NC6



ENG\_CVM\_CVM\_4-1437664-1\_M1.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_4-1437664-1\_M1.3d\_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

## Datasheets & Catalog Pages

**BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS** 

English

1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English