TE Internal #: 487923-1


Pin Contact, Tin-Lead, FFC, Solder Tab, Phosphor Bronze, Signal,

-55 – 105 °C [-67 – 221 °F]

View on TE.com >



Connectors > Contacts > Connector Contacts > FFC Connector Pin Contacts, 1.27 mm

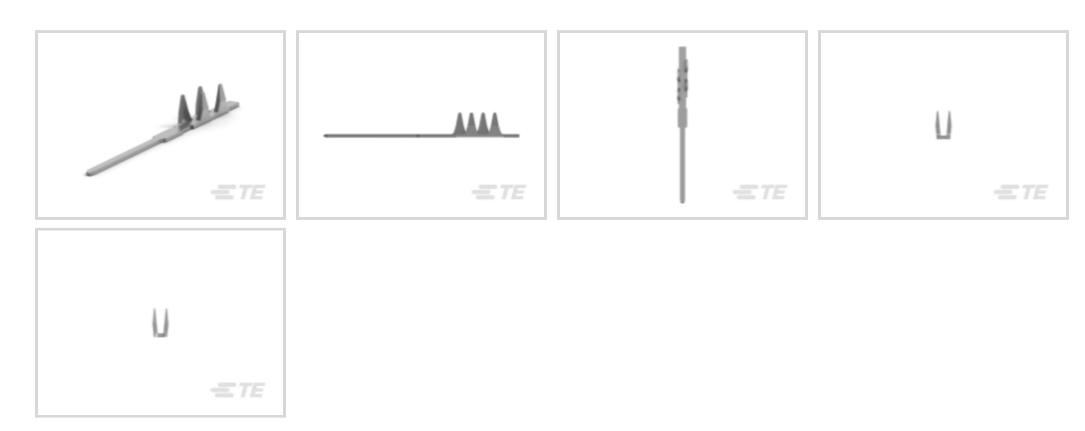

Contact Type: Pin

Contact Mating Area Plating Material: **Tin-Lead**Compatible With Wire & Cable Type: **FFC**

Termination Method to Wire & Cable: Solder Tab

Contact Base Material: Phosphor Bronze

All FFC Connector Pin Contacts, 1.27 mm (8)

Compatible With Wire & Cable Type

Termination Method to Wire & Cable

Product Terminates To

Features

Configuration Features

Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Mating Area Plating Material Thickness	2.54 μm
Contact Mating Area Plating Material Finish	Bright
Contact Type	Pin
Contact Mating Area Plating Material	Tin-Lead
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1.5 A
Termination Features	

FFC

Solder Tab

Wire & Cable



Dimensions

Accepts Conductor Width	.66 mm
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Customers Also Bought





FFC,RCPT CONTACT,STD PRESSURE















Documents

Product Drawings

FFC SDR TAB 100 FULL SN-PB

English

CAD Files

Customer View Model

ENG_CVM_CVM_487923-1_S.2d_dxf.zip

English

3D PDF



3D

Customer View Model

ENG_CVM_CVM_487923-1_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_487923-1_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English