5148417-5 ACTIVE

EUROCARD | EUROCARD TYPE M

TE Internal #: 5148417-5

Receptacle, Board-to-Board, 78 Position, 2.54 mm [.1 in] Centerline,

Printed Circuit Board, 3 Row, Vertical, EUROCARD TYPE M,

Eurocard Connectors

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors











Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Termination Post & Tail Length: 4.83 mm [.19 in]

Number of Positions: 78

Centerline (Pitch): 2.54 mm [.1 in]

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Standard
DIN Level	

Configuration Features

Number of Power or Coaxial Positions	2
Number of Positions	78
Number of Rows	3
PCB Mount Orientation	Vertical
Number of Columns	26
Rows Loaded	A, B, C
Number of Signal Positions	78

Body Features



Primary Product Color	Gray
Contact Features	
Contact Base Material	Copper Alloy
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	4.83 mm[.19 in]
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polymer - GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)



Candidate List Declared Against: JAN 2025
(247)
Does not contain REACH SVHC
Not Low Halogen - contains Br or Cl > 900

Halogen Content

Not Low Halogen - contains Br or Cl > 900
ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts










Also in the Series | EUROCARD TYPE M

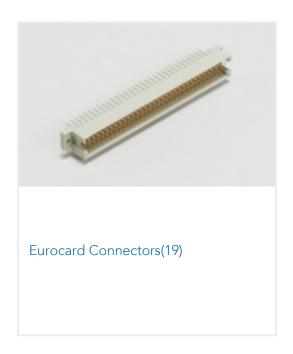

Customers Also Bought

















Documents

Product Drawings

ASSY, RECPT, TYPE M, EUROCARD, L-F

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5148417-5_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5148417-5_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5148417-5_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

UL

English