

AMP-HDI

TE Internal #: 533294-1 PCB Mount Header, Vertical, Board-to-Board, 240 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole -Press-Fit, Signal

View on TE.com >





PCB Connector Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 240

Number of Rows: 3

Features



Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly
Configuration Features	
Stackable	No
Stackable PCB Mount Orientation	No Vertical
PCB Mount Orientation	Vertical
PCB Mount Orientation Number of Positions	Vertical 240
PCB Mount OrientationNumber of PositionsNumber of Rows	Vertical 240

PCB Mount Header, Vertical, Board-to-Board, 240 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Press-Fit, Signal



Primary Product Color	Natural
Contact Features	
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Four Beam, Square
Contact Layout	Matrix
	.21 in
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	3 A
Termination Features	
Termination Post & Tail Length	6.35 mm[.25 in]
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment Type	Keyed

PCB Mount Retention Type	Action/Compliant Tail
PCB Mount Retention	With
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	With
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Height	11.73 mm[.462 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Solder Process Feature	Board Standoff

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 240 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Press-Fit, Signal



Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	2
Packaging Method	Tube
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in
	other sources.

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


PCB Mount Header, Vertical, Board-to-Board, 240 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Press-Fit, Signal





Customers Also Bought



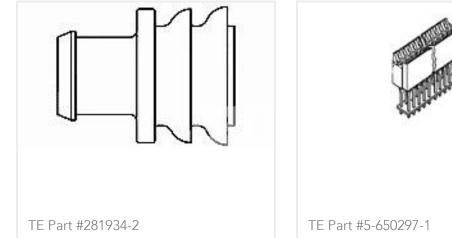

SINGLE WIRE SEAL

-TE

Documents

Product Drawings HDI PIN ASSY 3 ROW 240 POS

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_533294-1_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_533294-1_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_533294-1_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

S For support call+1 800 522 6752

04/14/2025 01:47PM | Page 4

PCB Mount Header, Vertical, Board-to-Board, 240 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Press-Fit, Signal



Datasheets & Catalog Pages

1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English