



Z-PACK | Z-PACK 2mm HM


TE Internal #: 5646488-1

Hard Metric Backplane PCB Mount Receptacle, ≤1 Gb/s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm

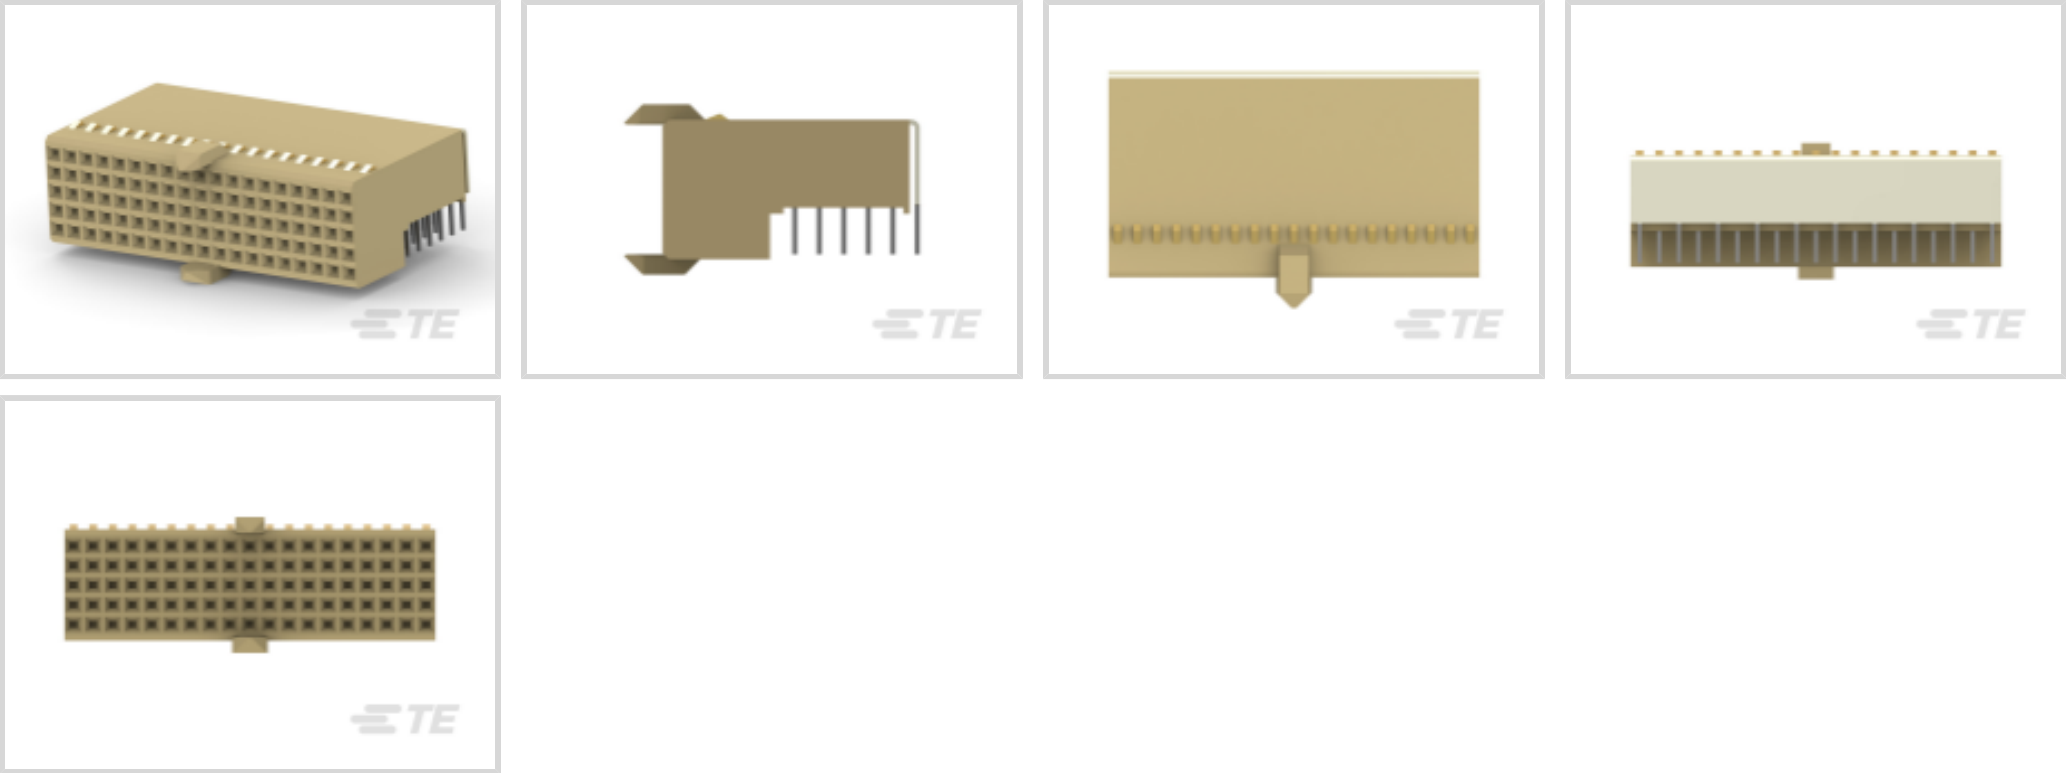

PCB Connector Type: **PCB Mount Receptacle**

Data Rate: **≤1 Gb/s**

Number of Columns: **19**

Number of Rows: **5**

Backplane Architecture: **Mezzanine**

[All HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm \(48\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Backplane Interface Type	2mm HM
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Sealable	No

Configuration Features

Rows Loaded	A, B, C, D, E
Number of Signal Positions	110, 125
Number of Columns	19
Number of Rows	5
Backplane Architecture	Mezzanine
Number of Positions	95



PCB Mount Orientation	Right Angle
-----------------------	-------------

Signal Characteristics

Crosstalk Version	Standard
Data Rate	≤1 Gb/s

Body Features

Primary Product Color	Gray
-----------------------	------

Contact Features

Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
CompactPCI Designation	None
PCB Contact Termination Area Plating Material	Tin
Feedthrough Post Length	3.3 mm
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.38 μm[15 μin]
Contact Current Rating (Max)	1.5 A

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Alignment Type	Multi-Purpose Center
Front Mating Level	Level 1

Housing Features

Housing Material	Polyester GF
Centerline (Pitch)	2 mm[.078 in]

Dimensions

Backplane Module Length	38 mm
-------------------------	-------

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	Yes
Circuit Application	Signal

Industry Standards

--	--



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	14
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 122562-1
SEATING TOOL

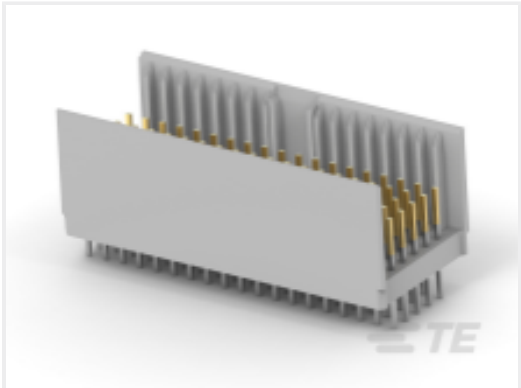

TE Part # 5646948-1
Z-PACK 2MM HM TYPE A/B 95P

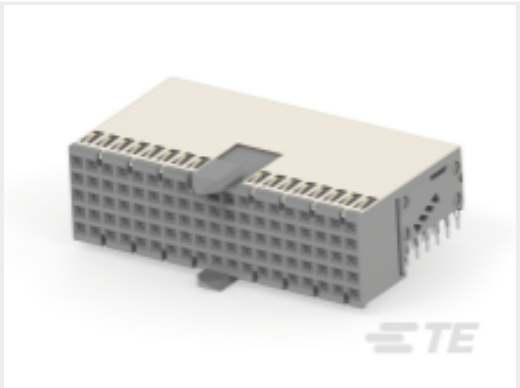

TE Part # 2392921-1
2MM H.M., A/B-19 RECEPT. ASSY. EON

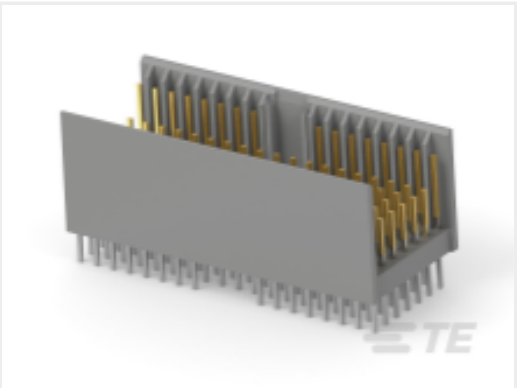

TE Part # 5646530-1
Z-PACK 2MM HM TYPE A/B 127P



Also in the Series

Z-PACK 2mm HM

Board-to-Board Headers & Receptacles(46)

Connector Contacts(2)

Connector Hardware(91)

Hard Metric Backplane Connectors (266)

Power Contacts(2)

Rectangular Power Connectors(46)

Customers Also Bought

TE Part #2176308-9
RP 1E 0.1W 162K 0.1% 25PPM 5K RL

TE Part #1-406507-4
IMJ,1X1,P GRD,INSLT,LED(Y/G)SN

TE Part #5747846-3
25 MSFL RCPT RA 318 (IN,FM,BL)

TE Part #2301996-8
RJ45 JACK INT.MAG. 1GB LED 1X2

TE Part #5747847-4
37 MSFL RCPT RA 318 (IN,FM,BL)

TE Part #6116522-1
INV MJ,1X2,PNL GRD,SHLD

TE Part #5-147278-4
05 MTE HDR SRRA SFMNT .100CL

TE Part #2301838-1
AMPL REC HD20, VERT, 9P, B/L,4-40 INS

TE Part #1-2176364-4
RQ 0402 6K34 0.1% 10PPM 5K RL

TE Part #4-1437142-1
FSN-22A-20=NOMEX FS STD



Documents

Product Drawings

2MM H.M., A/B-19 RECEPT. ASSY.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5646488-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5646488-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5646488-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English