




Connectors > Contacts > Connector Contacts

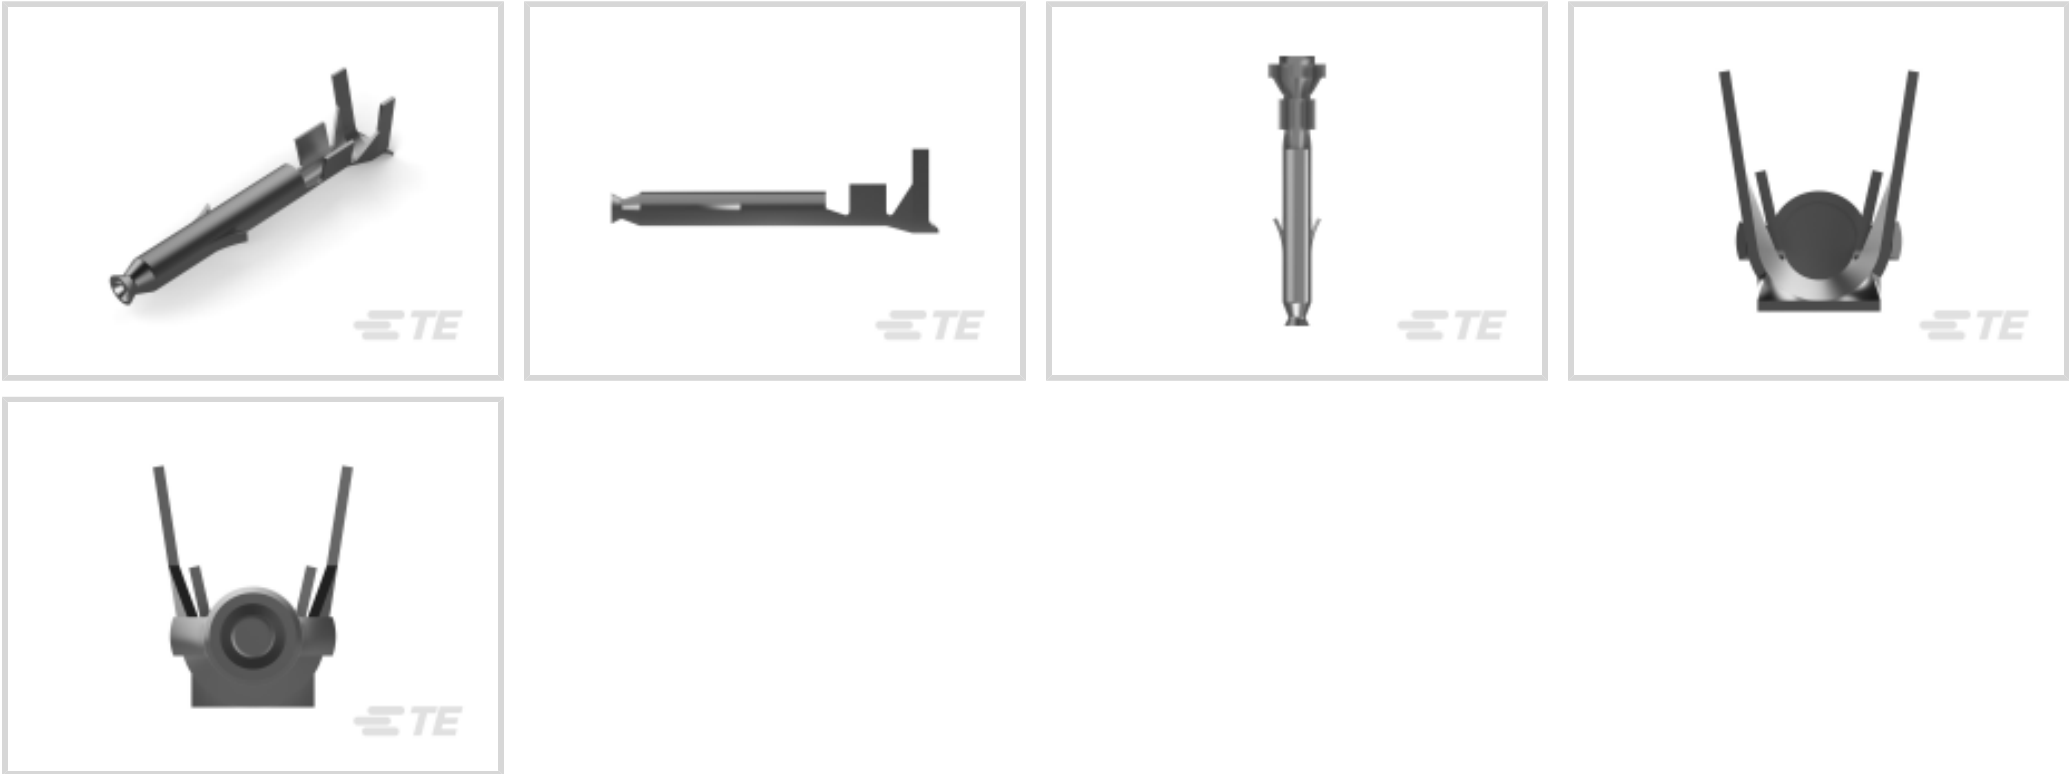

Contact Type: **Socket**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Contact Orientation	Straight
Mating Pin Diameter	1 mm[.039 in]
Wire Contact Termination Area Plating Material Finish	Matte
Wire Contact Termination Area Plating Thickness	2.54 µm[100 µin]
Contact Type	Socket
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	11.2 A



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	1.5 – 2.39 mm[.059 – .094 in]
Wire Size	.3 – .9 mm ²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-172233-2 2 POS MINI UNIV FREE HANG RED	 TE Part # 1-172156-2 1 POS SR MINI UNIV	 TE Part # 1-172165-5 2CIR MINI U-M-N-L PLUG GREN	 TE Part # 1-172338-4 MINI U-M-N-L PLUG 4P YELLOW
 TE Part # 1586404-1 16P MINI UMNL CAP HSG SEALED	 TE Part # 172168-1 6 CIR UNIV M-N-L PLUG	 TE Part # 770581-1 12P MINI UMNL PLUG HSG	 TE Part # 172234-1 3P MINI UNIVERSAL MATE-N-LOK CAP HOUSING
 TE Part # 172333-1 MINI UNIVERSAL M-N-L HOUSING	 TE Part # 1445819-1 PLUG,11-6,SM INS,STD KEY	 TE Part # 1445821-1 REC,11-8,FLNG MT,SM INS,STD KE	 TE Part # 1445824-1 REC,11-5,FLNG MT,SM INS,STD KE
 TE Part # 1445827-3 REC,11-7,FRE HNG,LG INS,STD KE	 TE Part # 1445818-1 PLUG,11-7,SM INS,STD KEY	 TE Part # 1445819-3 PLUG,11-6,LG INS,STD KEY	 TE Part # 1445535-1 PLUG,8-2,LG INS,STD KEY




TE Part # 1445817-1
PLUG,11-8,SM INS,STD KEY



TE Part # 794821-1
08P MINI UMNL PLUG HSG



TE Part # 1-172157-9
2CIR MINI U-M-N-L CAP BLCK



TE Part # 1-172167-2
4 POS DR MINI UNIV

Also in the Series | Mini-Universal MATE-N-LOK



Connector Caps & Covers(2)



Connector Contacts(89)



Connector Hardware(4)



Power Contacts(89)



Rectangular Connector Housings(104)



Rectangular Power Connectors(196)



Standard Rectangular Connectors(104)

Customers Also Bought



TE Part #794939-1
04P MINI UMNL CAP HSG



TE Part #794781-1
10P MINI UMNL PLUG HSG



TE Part #2273051-1
M12 Male pnl Mld Rear Mt PG9 pigt A



TE Part #794995-1
MINI UMNL CAVITY PLUG SEAL



TE Part #794895-1
6 CIR MINI UMNL RND WIRE HOLES



TE Part #794941-1
08P MINI UMNL CAP HSG



TE Part #794821-1
08P MINI UMNL PLUG HSG



TE Part #770985-1
MINI UMNL PIN 26-22AWG SN LP



Documents

Product Drawings

MINI UMNL SOK 22-18AWG SN LP

English

CAD Files

Customer View Model

ENG_CVM_CVM_770988-1_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_770988-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_770988-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications Continued

English

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English