



Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Right Angle, 1.27mm



Number of Positions: 50

Connector & Housing Type: Receptacle

Connector System: Cable-to-Board

Connector Mounting Type: Board Mount

Centerline (Pitch): 1.27 mm [.05 in ]

[All D-Sub Receptacle Assembly: Right Angle, 1.27mm \(74\)](#)

Features

Product Type Features

Shell Material Configuration	Full Metal Shell
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Rows	2
Number of Positions	50

Body Features

Assembly Process Feature Material	Copper Alloy
Shell Plating Finish	Bright
Shell Plating Material	Nickel over Copper



Primary Product Color	Black
Connector Profile	Standard

Contact Features

Contact Underplating Material	Palladium Nickel
	30 µin
Contact Mating Area Plating Material	Gold or Gold Flash
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin-Lead over Nickel
Contact Current Rating (Max)	1 A
Contact Options	Installed

Termination Features

Rectangular Termination Post & Tail Width	.41 mm[.016 in]
Rectangular Termination Post & Tail Thickness	.3 mm[.011 in]
Termination Method to PCB	Through Hole - Press-Fit, Through Hole - Solder
Termination Post & Tail Length	2.54 mm[.1 in]

Mechanical Attachment

Mating Retention Type	Latch
PCB Mount Retention	With
	.109 in
Mating Retention	With
Mating Alignment Type	Rails
PCB Mount Retention Type	Boardlock
Mating Alignment	With
PCB Mount Alignment	Without
Assembly Process Feature Plating Material	Tin-Lead over Nickel
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Thermoplastic
Shell Material	Carbon Steel
Centerline (Pitch)	1.27 mm[.05 in]

Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
--------------------	----------------



PCB Thickness (Recommended)1.57 mm[.062 in]

Usage Conditions

Operating Temperature Range-55 – 105 °C[-67 – 221 °F]

Operation/Application

ShieldedYes  
Circuit ApplicationSignal

Industry Standards

UL Flammability RatingUL 94V-0  
Compatible With Approved Standards ProductsUL E28476

Packaging Features

Packaging Quantity10  
Packaging MethodTube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EUNot Compliant  
EU ELV Directive 2000/53/ECCompliant with Exemptions  
China RoHS 2 Directive MIIT Order No 32, 2016Restricted Materials Above Threshold  
EU REACH Regulation (EC) No. 1907/2006  
Current ECHA Candidate List: JAN 2025 (247)  
Candidate List Declared Against: JAN 2025 (247)  
SVHC > Threshold:  
Pb (13% in 4690948374)  
**Article Safe Usage Statements:**  
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.  
Halogen ContentNot Low Halogen - contains Br or Cl > 900 ppm.

Solder Process CapabilityWave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Also in the Series | **AMPLIMITE 0.50 Series**



Connector Backshells(21)




Connector Caps & Covers(20)

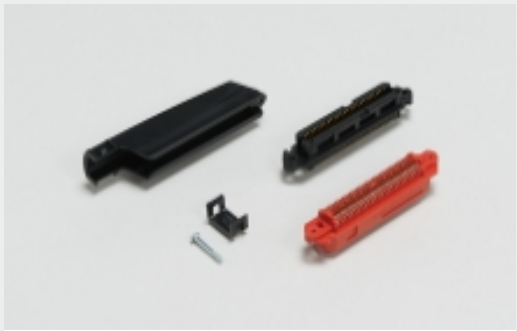

IDC D-Sub Connectors(69)



Insertion & Extraction Tools(1)

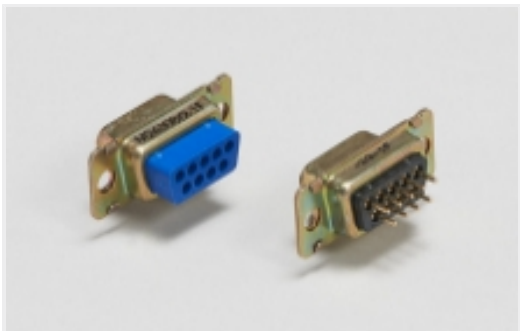

Panel Mount D-Sub Connectors(28)



PCB D-Sub Connectors(172)


Customers Also Bought



TE Part #748364-1  
15 HD22 CRIMP SNAP PLUG



TE Part #205205-2  
CRIMP SNAP RCPT ASSY,SIZE 2

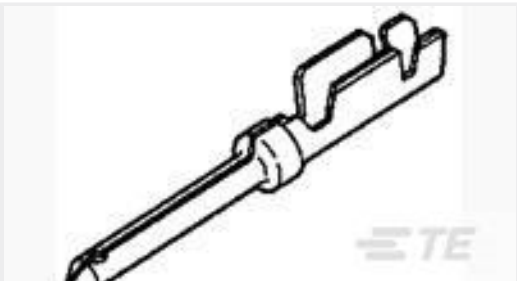

TE Part #1658670-4  
PIN CONTACT,22 DF,LP,22-28 AWG



TE Part #66506-4  
HD 20 DF PIN PLTD



TE Part #1658683-1  
HDP-22,RCPT,SIZE 3,44 POSN



TE Part #1375820-2  
CST-100 II HOUSING 2 POS



TE Part #205203-3  
CRIMP SNAP RCPT ASSY,SIZE 1



TE Part #1658672-1  
HDP-22,PLUG,SIZE 3,44 POSN



TE Part #207463-1  
CRIMP SNAP RCPT ASSY,SZ 3



TE Part #1-66504-0  
SOCKET CONTACT, 20 DF

Documents

Product Drawings

50 50SR R/A RCPT ASSY,REDESIGN

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_787171-5\_V.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_787171-5\_V.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_787171-5\_V.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL

English